



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number:

0 520 732 B1

⑫

EUROPEAN PATENT SPECIFICATION

⑯ Date of publication of patent specification: 06.12.95 ⑮ Int. Cl.⁶: C08F 10/00, C08F 4/74

⑯ Application number: 92305730.1

⑯ Date of filing: 22.06.92

The file contains technical information submitted
after the application was filed and not included in
this specification

⑯ Homogeneous olefin polymerization catalyst by ligand abstraction with lewis acids.

⑯ Priority: 24.06.91 US 720041
05.05.92 US 876268

⑯ Date of publication of application:
30.12.92 Bulletin 92/53

⑯ Publication of the grant of the patent:
06.12.95 Bulletin 95/49

⑯ Designated Contracting States: —
BE DE ES FR GB IT NL SE

⑯ References cited:
EP-A- 0 418 044

⑯ Proprietor: THE DOW CHEMICAL COMPANY
2030 Dow Center,
Abbott Road
Midland,
Michigan 48640 (US)

⑯ Inventor: LaPointe, Robert E.
3824 Todd Street
Midland,
Michigan 48640 (US)
Inventor: Stevens, James C.
2704 Georgetown Drive
Midland,

Michigan 48642 (US)
Inventor: Nickias, Peter N.
4512 North Saginaw Road,
Apartment 1120
Midland,
Michigan 48640 (US)
Inventor: McAdon, Mark H.
2810 Dawn Drive
Midland,
Michigan 48642 (US)

⑯ Representative: Burford, Anthony Frederick et
al
W.H. Beck, Greener & Co.
7 Stone Buildings
Lincoln's Inn
London WC2A 3SZ (GB)

Best Available Copy

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 520 732 B1

Description

This invention relates to a method for preparing compositions of matter that are useful as addition polymerization catalysts. More particularly, this invention relates to a method for preparing homogeneous, cyclic cyclopentadienyl metal complex cationic, catalyst by abstraction with Lewis acids.

5 In EP-A-416,815 there are disclosed and claimed certain cyclic cyclopentadienyl metal complexes having utility as homogeneous olefin polymerization catalysts. In EP-A-418,044 cationic monocyclopentadienyl metal complexes containing a non-coordinating compatible anion are disclosed and claimed. In EP-A-468,651, an oxidative activation technique for preparing such cationic cyclic cyclopentadienyl metal 10 complexes is disclosed and claimed.


10 In J. Am. Chem. Soc. 113, 3623-3625 (1991) there is disclosed a process for preparation of "cation like" zirconocene polymerization complexes by alkyl abstraction using tris(pentafluorophenyl)borane. The complexes were stated to have activity roughly comparable to typical complexes based on alumoxane. No suggestion as to the suitability of the disclosed technique for use with constrained geometry metal catalysts 15 is provided by the reference.

15 In J. Organometal. Chem., 22, 659-663 (1970), there is disclosed the reaction between tetramethyl-titanium and triphenylborane or tribenzylborane. The authors postulate the intermediate formation of cationic titanium species which were not isolated during the reaction. No suggestion as to the suitability of the disclosed reaction for use in catalysis is provided by the reference.

20 Previously known techniques for preparing cationic cyclic cyclopentadienyl metal complexes have been disadvantaged by requiring difficult synthetic procedures to prepare the necessary precursors and low yields of isolated products. It would be desirable if there were provided an improved technique for preparing cationic cyclic cyclopentadienyl metal complexes which avoids difficult synthetic procedures and poor yields.

25 It has now been discovered that the foregoing and other disadvantages of the prior art cationic, olefin polymerization catalysts can be avoided or at least reduced with the process of the present invention. Surprisingly the catalysts of the present invention are marked by extremely high catalytic effectiveness as measured by polymer yield at a given temperature.

30 In accordance with the present invention there is provided a process for preparing a cyclic cyclopentadienyl metal complex having a limiting charge separated structure corresponding to the formula II:

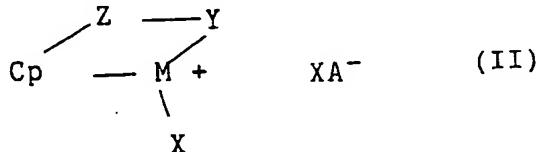

40 wherein:

M is a metal of Group 4 or the Lanthanide series of the Periodic Table of the Elements;

Cp is a cyclopentadienyl group or derivative thereof that is π -bound to M and substituted at least by Z;

Z is a divalent moiety comprising oxygen, sulfur, boron, or a member of Group 14 of the Periodic Table of the Elements;

45 Y is a ligand group comprising nitrogen, phosphorus, oxygen or sulfur or optionally Z and Y together form a fused ring system;


X independently each occurrence is hydride or a hydrocarbyl, silyl or germyl group having up to 20 carbon, silicon or germanium atoms; and

50 A⁻ is a non-coordinating, compatible anion of a Lewis acid, A, having relative Lewis acidity greater than or equal to that of phenylbis(perfluorophenyl)borane,

the steps of the process comprising contacting a derivative of a Group 4 or Lanthanide metal corresponding to the formula I:

Best Available Copy


Best Available Copy

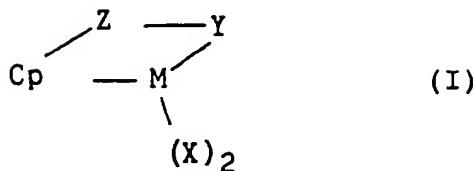

10 wherein

M, Cp, Z, Y, and X are as previously defined, with the Lewis acid, A.

The preceding formula for the catalyst compositions is referred to as the limiting, charge separated structure. However, it is to be understood that, particularly in solid form, the catalyst may not be fully 15 charge separated. That is, the X group may retain a partial covalent bond to the metal atom, M. Thus, the catalysts may be alternately depicted as an ion pair possessing the formula:



The catalysts are preferably prepared by contacting the derivative of formula I with the Lewis Acid in an 25 inert diluent such as an organic liquid.


All reference to the Periodic Table of the Elements herein refer to the Periodic Table of the Elements, published and copyrighted by CRC Press, Inc., 1989. Also, any reference to a Group or Groups are to the Group or Groups as reflected in this Periodic Table of the Elements using the IUPAC system for numbering groups.

30 By the term "derivative" in the definition of Cp is meant that each atom in the cyclopentadienyl group may independently be substituted with a radical selected from hydrocarbyl radicals, substituted- hydrocarbyl radicals wherein one or more hydrogen atoms are replaced by a halogen atom, hydrocarbyl-substituted metalloid radicals wherein the metalloid is selected from Group 14 of the Periodic Table of the Elements, and halogen radicals. Suitable hydrocarbyl and substituted-hydrocarbyl radicals used to form derivatives of 35 the delocalized π -bonded group contain from 1 to 20 carbon atoms and include straight and branched alkyl radicals, cyclic hydrocarbon radicals, alkyl-substituted cyclic hydrocarbon radicals, aromatic radicals and alkyl-substituted aromatic radicals. In addition two or more such radicals may together form a fused ring system or a hydrogenated fused ring system. Examples of the latter are indenyl-, tetrahydroindenyl-, fluorenyl-, and octahydrofluorenyl- groups. Suitable hydrocarbyl-substituted organometalloid radicals include 40 mono-, di- and tri- substituted organometalloid radicals of Group 14 elements wherein each of the hydrocarbyl groups contains from 1 to 20 carbon atoms. More particularly, suitable hydrocarbyl-substituted organometalloid radicals include trimethylsilyl, triethylsilyl, ethyldimethylsilyl, methyldiethylsilyl, triphenylgermyl, and trimethylgermyl.

45 Preferably M is a metal of Group 4 of the Periodic Table of the Elements, most preferably titanium or zirconium. Also, preferably X is C₁-C₁₀ hydrocarbyl, most preferably benzyl and especially methyl.

In a preferred embodiment -Z-Y- is an amidosilane or amidoalkane group, preferably of up to 20, especially up to 10, nonhydrogen atoms and especially (tert-butylamido) (dimethylsilyl) or (tert-butylamido)-1-ethane-2-yl.

50 Most preferred derivatives of formula I are amidosilanediyl- or amidoalkanediyl- compounds corresponding to the formula III:

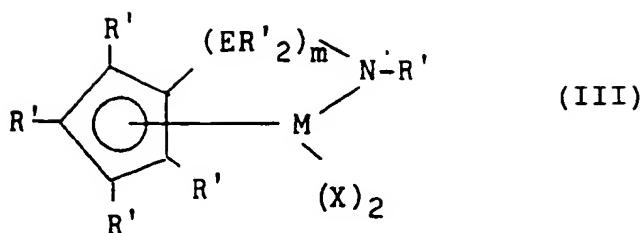

10

wherein:

M is titanium or zirconium, bound to an η^5 -cyclopentadienyl group;

R' each occurrence is independently selected from hydrogen, silyl, alkyl, aryl and combinations thereof having up to 20 carbon or silicon atoms, and optionally two or more R' groups on the cyclopentadienyl group form a fused ring system;

15 E is silicon or carbon;

X independently each occurrence is hydride, trimethylsilyl, alkyl, aryl or halogen substituted aryl of up to 20 carbons; and

m is 1 or 2.

20 Examples of the above most preferred metal coordination compounds include compounds wherein the R' on the amido group is methyl, ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), norbornyl, benzyl, or phenyl; the cyclopentadienyl group is cyclopentadienyl, indenyl, tetrahydroindenyl, fluorenyl, tetrahydrofluorenyl, or octahydrofluorenyl; R' on the foregoing cyclopentadienyl groups each occurrence is hydrogen, methyl, ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), 25 norbornyl, benzyl, or phenyl; and X is methyl, neopentyl, trimethylsilyl, norbornyl, benzyl, methylbenzyl, phenyl, or pentafluorophenyl.

Illustrative derivatives of formula I that may be employed in the practice of the present invention include: [dimethyl(tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)ilane] dibenzylzirconium, [dimethyl(tert-butylamido)-(tetramethyl- η^5 -cyclopentadienyl)ilane] dibenzyltitanium, [dimethyl(tert-butylamido)-(tetramethyl- η^5 -cyclopentadienyl)ilane] dimethyl-titanium, [(tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyl] dibenzylzirconium, [(tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyl] dibenzyltitanium, [(methylamido)(η^5 -cyclopentadienyl)-1,2-ethanediyl] dibenzhydrylzirconium, [- (methylamido)(tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyl] dineopentyltitanium, [(phenylphosphido)-(tetramethyl- η^5 -cyclopentadienyl)methylene] diphenyltitanium, [dibenzyl(tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)ilane] dibenzylzirconium, [dimethyl(benzylamido)(η^5 -cyclopentadienyl)ilane] di-35 (trimethylsilyl)titanium, [dimethyl(phenylphosphido)(tetramethyl- η^5 -cyclopentadienyl)ilane] dibenzylzirconium, [dimethyl(tert-butylamido)(tetramethyl- η^5 -cyclopentadienyl)ilane] dibenzylhafnium, [(tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyl] dibenzyltitanium, [2- η^5 -(tetramethylcyclopentadienyl)-1-methyl-ethanolato (2-)] dibenzyltitanium, [2- η^5 -(2-)] dibenzyltitanium, [2- η^5 -(tetramethylcyclopentadienyl)-1-methyl-ethanolato (2-)] dimethyltitanium, [2- η^5 -(2-)] 40 (tetramethylcyclopentadienyl)-1-methyl-ethanolato (2-)] dibenzylzirconium, [2- η^5 -(tetramethylcyclopentadienyl)-1-methyl-ethanolato (2-)] dimethylzirconium, [2-[(4a, 4b, 8a, 9, 9a - η)-9H-fluoren-9-yl]-cyclohexanolato (2-)] dibenzyl titanium, [2-[(4a, 4b, 8a, 9, 9a - η)-9H-fluoren-9-yl]cyclohexanolato (2-)] dimethyl zirconium, and [2-[(4a, 4b, 8a, 9, 9a - η)-9H-fluoren-9-yl]cyclohexanolato (2-)] dibenzyl zirconium.

45 Other compounds which are useful in the catalyst compositions of this invention, especially compounds containing other Group 4 or Lanthanide metals, will, of course, be apparent to those skilled in the art.

"Non-coordinating" anions refers to those that either do not coordinate to or are only weakly coordinated to said metal cation, thereby remaining sufficiently labile to be displaced by a neutral Lewis base. A "compatible" anion additionally refers to such an anion that, when functioning as a charge 50 balancing anion in the catalyst system of this invention, within the time frame of the desired end use, does not transfer an anionic substituent or fragment thereof to the cation thereby forming a neutral metallocene and a neutral metal byproduct. In addition such anions are not degraded to neutrality when the initially formed complex decomposes and are noninterfering with desired subsequent polymerizations or other uses of the complex.

55 The Lewis acids having Lewis acidity suitable for use according to the present invention are prepared according to known techniques such as those of Marks, et al. *J. Am. Chem. Soc.* 1991, 113, 3623-3625, or J. Pohlman, et al., *Naturforschg.* 1965, 20b, 5-11. The preferred technique is to combine a boron or aluminum halide compound such as boron trichloride or boron trifluoride with an alkali metal or alkaline

earth derivative of the desired substituent or substituents. Additionally, borate esters such as tris-(perfluorophenyl) borate may be prepared by the reaction of pentafluorophenylphenol and borane-methyl sulfide complex according to the method of J. Org. Chem., 43(13) 2731-32 (1978).

Lewis acidity may be measured by empirical means and may also be predicted with a high degree of certainty based on theoretical methods. A preferred technique for measuring Lewis acidity is the proton NMR chemical shift of the proton on carbon #3 (H-3) of crotonaldehyde complexes of the Lewis acid. This technique was disclosed by R. Childs et al., Can. J. Chem., 1982, 802-808. A similar technique for determining Lewis acidity was taught in P. Laslo et al. J. Am. Chem. Soc. 1990, 12, 8750-8754. The units of measurement are $\Delta\delta$ (ppm). It has been discovered that the technique may be practiced at temperatures at or less than 25°C without deleterious effect.

The difference in chemical shift of the 3-hydrogen of free, uncomplexed crotonaldehyde and the 3-hydrogen of the complexed Lewis acid adduct is determined. This chemical shift difference ($\Delta\delta$ in ppm) is related to the Lewis acidity of the species under study, with the trend being the more downfield the 3-hydrogen is shifted, the greater the Lewis acidity of the compound being examined. The chemical shift difference of phenylbis(perfluorophenyl)borane is 0.77 ppm. More Lewis acidic compounds have chemical shift differences, $\Delta\delta$, more than 0.77. Preferred Lewis acids have an acidity from 0.77 to 1.49, more preferably from 1.0 to 1.49. Thus, by the Childs et al. technique, useful Lewis acids for the present invention are acids having relative acidity compared to phenylbis(perfluorophenyl)borane, $\Delta\delta^* - \Delta\delta^0 \geq 0$ (where $\Delta\delta^*$ is the Lewis acidity of the candidate Lewis acid and $\Delta\delta^0$ is the Lewis acidity of phenylbis(perfluorophenyl)borane). Preferred Lewis acids are those having relative acidity from 0 to 0.72, more preferably from 0.23 to 0.72.

Detrimental reactivity of Lewis acids includes abstraction of one or more groups from the anion by the cationic portion of the catalyst. Readily extractable groups comprise the halides when such halide is directly attached to a central Group 13 metalloid.

Thus, most preferred non-reactive Lewis acids are Lewis acids that are devoid of halide groups directly attached to a central Group 13 metalloid, especially boron. Stated otherwise, most preferred Lewis acids are boron compounds devoid of halogen moieties directly attached to the boron.

Theoretical techniques may also be utilized to calculate the acidity of Lewis acids suitable for use according to the present invention. Several commercially available computer programs may be used to calculate the Lewis acidity. In a preferred technique theoretical structures and total energies may be calculated for candidate molecules in a proposed reaction of a Lewis acid with a Lewis base to form a complex. Molecules giving larger calculated heats of complexation indicate greater Lewis acidity. A program such as GAUSSIAN 90, or similar molecular simulation software may be used for the simulation and analysis of such materials.

First, the initial structures are optimized by minimizing the calculated total energy with respect to all degrees of freedom: bond lengths, bond angles, and torsional angles. The heat of reaction (ΔH) is then calculated as being the difference between the total energy of the products and the total energy of the reactants e.g.,

$$40 \quad \Sigma E_{(products)} - \Sigma E_{(reactants)},$$

where

E is approximated by the quantum mechanical energy (E_{QM}) at absolute zero temperature (0° Kelvin) for reactants and products.

By the foregoing technique the Lewis acidity of a compound towards a Lewis base such as methyl anion (CH_3^-) or ammonia can be calculated, using the formula:



where A is the Lewis acid and "base" is the Lewis base. If the reaction is exothermic ($\Delta H < 0$), then A is a stronger Lewis acid than phenylbis(perfluorophenyl)boron. Relative acidity is determined by comparison to the calculated ΔH of phenylbis(perfluorophenyl)boron, which by definition is 0.0 kcal/mole.

Based on the foregoing empirical and theoretical techniques highly preferred Lewis acids are: tris(pentafluorophenyl)borane, tris (2,3,5,6-tetrafluorophenyl)borane, tris(2,3,4,5-tetrafluorophenyl)borane, tris(3,4,5-trifluorophenyl)borane, tris(1,2,2-trifluoroethyl)borane, phenylbis(perfluorophenyl)borane, tris(3,4,5-trifluorophenyl)aluminum, tris(perfluorophenyl) borate, 1,3,5-cyclohexanetriol borate (cyclohexane-r-1, c-3, c-5-triol borate), and 1,1,1-trimethylolethane borate (2,6,7-trioxa-1-bora-4-methylbicyclo[2.2.2] octane) (the latter two compounds may be prepared according the technique of US-A-2,909,560, by the condensation of

Best Available Copy

1,3,5-cyclohexanetriol or 1,1,1-trimethylolethane with boric acid).

Without wishing to be bound by any particular theory of operation it is believed that the Lewis acid causes the abstraction of the X group and in the process becomes an anionic species. This result is believed to be of practical significance for the present invention where the Lewis acid is a stronger Lewis acid than the resulting cation. The specific Lewis acids of the present invention are highly effective in this regard.

In general, the catalyst can be prepared by combining the two components (the derivative of formula I and the Lewis acid) in a suitable solvent at a temperature within the range from -100°C to 300°C, preferably 25 to 50°C. Suitable solvents include straight and branched-chain hydrocarbons such as isobutane, butane, pentane, hexane, heptane, octane, and mixtures thereof; cyclic and alicyclic hydrocarbons such as cyclohexane, cycloheptane, methylcyclohexane, methylcycloheptane, perfluorinated hydrocarbons such as perfluorinated C₄-₁₀ alkanes and aromatic and alkyl- substituted aromatic compounds such as benzene, toluene and xylene. Suitable solvents also include liquid olefins which may act as monomers or comonomers including ethylene, propylene, butadiene, cyclopentene, 1-hexene, 3-methyl-1-pentene, 4-methyl-1-pentene, 1,4- hexadiene, 1-octene, 1-decene, styrene, divinylbenzene, allylbenzene and vinyl-toluene (including all isomers alone or in admixture). Preferred solvents are aliphatic hydrocarbons especially C₅-C₁₀ alkanes or cycloalkanes and mixtures thereof.

The catalyst may be used to polymerize addition polymerizable monomers having from 2 to 1000 carbon atoms. Examples include: ethylenically unsaturated compounds, acetylenic compounds, conjugated or nonconjugated dienes, polyenes, and carbon monoxide. Preferred addition polymerizable monomers are olefins or diolefins having from 2 to 18 carbon atoms. Preferred monomers include the C₂-₁₈ α -olefins especially ethylene, propylene, isobutylene, 1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-nonene, 1- decene, 1-dodecene, 1-tetradecene, 1-hexadecene, and 1-octadecene. Other preferred monomers include styrene, halo- or alkyl substituted styrenes, tetrafluoroethylene, vinylbenzocyclobutane, 1,4-hexadiene, norbornene, and substituted norbornenes such as 5-ethylidene-2-norbornene. Most preferred monomers are α -olefins having from 2 to 12 carbon atoms either alone or in combination. The catalyst may also be used to polymerize α -olefins, diolefins and/or acetylenically unsaturated monomers in combination with other unsaturated monomers.

In general, the polymerization may be accomplished at conditions well known in the prior art for Ziegler-Natta or Kaminsky-Sinn type polymerization reactions, that is, temperatures from 0 to 250°C and pressures from atmospheric to 1000 atmospheres (100 MPa). Suspension, solution, slurry or other process condition may be employed if desired. A support may be employed but preferably the catalysts are used in a homogeneous manner. It will, of course, be appreciated that the catalyst system will form *in situ* if the components thereof are added directly to the polymerization process and a suitable solvent or diluent, including condensed monomer, is used in said polymerization process. It is, however, preferred to form the catalyst in a separate step in a suitable solvent prior to adding the same to the polymerization mixture.

It is believed that the active catalyst species of the present invention contains a metal center which center remains cationic, unsaturated and has a metal-carbon bond which is reactive with olefins, diolefins and acetylenically unsaturated compounds. Also associated with this metal center is a charge balancing anionic remnant of the formula XA⁻. As previously mentioned the catalyst may also exist in a less than fully charge-separated configuration.

The catalyst formed by the method of this invention may be retained in solution or separated from the solvent, isolated, and stored for subsequent use. As previously indicated supra, the catalyst may also be prepared *in situ* during a polymerization reaction by passing the separate components into the polymerization vessel where the components will contact and react to produce the catalyst.

The equivalent ratio of derivative of formula I to Lewis acid employed is preferably in a range (complex: Lewis acid) from 0.1:1 to 10:1, more preferably from 0.2:1 to 5:1, most preferably 1:2. In most polymerization reactions the equivalent ratio of catalyst: polymerizable compound employed is from 10⁻¹²:1 to 10⁻¹:1, more preferably from 10⁻⁹:1 to 10⁻⁴:1.

A beneficial feature of the catalysts of this invention, especially the titanium based catalysts, is that when the catalysts of this invention are used to copolymerize olefins, either alone or in combination with diolefins, the amount of higher molecular weight olefin or diolefin incorporated into the copolymer is significantly increased when compared to copolymers prepared with the more conventional Ziegler-Natta type catalysts. In addition, when compared to constrained geometry catalysts containing alumoxane, the catalysts of the present invention possess higher activities. Typically, catalyst efficiencies of the present catalysts (measured by weight of polymer produced/catalyst weight) are at least five times greater than that obtained with comparable alumoxane containing catalysts.

In general, catalysts can be selected so as to produce polymer products which will be relatively free of large amounts of certain trace impurities such as aluminum, magnesium and chloride generally found in polymers produced with Ziegler-Natta type catalysts. The polymer products produced with the catalysts of this invention have a broader range of applications than polymers produced with more conventional Ziegler-Natta type catalysts comprising a halogenated metal alkyl such as magnesium chloride, or an alkyl aluminum chloride.

Having described the invention the following examples are provided as further illustration thereof. Unless stated to the contrary all parts and percentages are expressed on a weight basis.

10 General Polymerization Procedure

Ethylene, propylene, and hydrogen were purified by passing through columns of 13X molecular sieve, activated alumina, and trace oxygen removal catalyst (alumina supported copper/manganese catalyst available from Englehardt Inc. under the tradename Q-5). Solvents and octene were degassed with nitrogen, then were purified by passing through columns of 13X molecular sieve, activated alumina, and trace oxygen removal catalyst. Phenylacetylene-free styrene was degassed with nitrogen, then purified by passing through a column of activated alumina. A 2 L stirred autoclave was charged with the desired amounts of a solvent and comonomer.

Hydrogen was added by differential pressure expansion from a 75 mL addition tank. The hydrogen pressure differential represents the difference in pressure between the starting and final pressure in the hydrogen addition tank after adding hydrogen to the 2L reactor containing solvent and comonomer. The reactor was heated to the polymerization temperature and was saturated with ethylene to the desired pressure. Metal complex and Lewis acid cocatalyst were mixed in a drybox by syringing the desired amount of 0.0050 M metal complex solution (in mixed alkane solvent (Isopar E™ available from Exxon Chemicals Inc.) or toluene) into a solution of the cocatalyst (in Isopar® E or toluene solvent). Optionally, additional solvent was added to facilitate transfer of the catalyst solution to the reactor. This solution was then transferred to a catalyst addition tank and injected into the reactor.

The polymerization was allowed to proceed for the desired time and then the solution was drained from the bottom of the reactor and quenched with isopropanol. A hindered phenolic antioxidant (Irganox® 1010, available from Ciba-Geigy Corporation) was added and the polymer was air dried overnight. The residual solvent was removed in a vacuum oven overnight.

Polymer melt indices (I2) were measured according to ASTM D-1238, Procedure A, Condition E, using a micro-melt indexer, Model CS-127MF, available from Custom Scientific Instruments, Inc. Densities are determined by buoyancy measurements of compression molded samples in methyl-ethyl-ketone...

35 Experimental Determination of Lewis acidity

The Lewis acidity of phenylbis(perfluorophenyl)borane was determined using NMR analysis substantially according to the technique of R. Childs, et al., Can. J. Chem., 1982, 60, 802-808. All manipulations were carried out either using standard Schlenk and/or high vacuum techniques or in an inert glovebox (Vacuum Atmospheres, Inc.) under recirculating, dry nitrogen with oxygen levels in the glove box being continuously monitored with an oxygen analyzer and maintained at < 1ppm. Crotonaldehyde purified by vacuum-transfer from calcium hydride and methylene chloride-d₂ (CD₂Cl₂) vacuum transferred from phosphorus pentoxide were used.

45 Proton NMR spectra were recorded either on a Varian VXR-300 NMR spectrometer or a Varian Gemini 300 NMR spectrometer. Chemical shifts were determined relative to tetramethylsilane through the residual CHDCl₂ (¹H, δ 5.32) in CD₂Cl₂. The NMR samples were prepared by adding an appropriate quantity of the Lewis acid compound to a solution of crotonaldehyde in CD₂Cl₂ at -20 °C and allowing the sample to warm slowly to room temperature. The stoichiometry of the resulting solution was such that there was a 50 percent excess of the Lewis acid reagent with a total concentration of reactants being about 0.3M. The ¹H NMR spectrum was then recorded, and H-3 NMR shift of the Lewis acid adduct of crotonaldehyde and free crotonaldehyde determined.

55 Theoretical calculation of Lewis acidity

Structures and energies were calculated using one or more of the following standard techniques of electronic structure theory.

Best Available Copy

1. AMI - Dewar's semi-empirical method based on approximate molecular orbital theory. AMI has been parametrized to fit selected experimental data. AMI calculation techniques are well known to those skilled in the art, and are described in, for example, M. J. S. Dewar, E. G. Zoebisch, E. F. Healy, and J. J. P. Stewart, *J. Am. Chem. Soc.*, 107, 3902 (1985); M. J. S. Dewar and Eve G. Zoebisch, *J. Mol. Struct. (THEOCHEM)* 180, 1 (1988); M. J. S. Dewar, C. Jie, and E. G. Zoebisch, *Organometallics*, 7, 513 (1988); M. J. S. Dewar and C. Jie, *Organometallics*, 6, 1486 (1987); M. J. S. Dewar and K. M. Merz, Jr., *Organometallics* 7, 522-4 (1988); M. J. S. Dewar and C. Jie, *Organometallics*, 8, 1547 (1989); M. J. S. Dewar and C. Jie, *Organometallics*, 8, 1544-7 (1989); and M. J. S. Dewar and A. J. Holder, *Organometallics*, 9, 508 (1990).

10 The AMI calculations are performed with the program MOPAC, version 5.00, available from the Quantum Chemistry Program Exchange (QCPE), Department of Chemistry, Indiana University, Bloomington, Indiana 47405. The program is further described in the MOPAC Manual, J. J. P. Stewart, Frank J. Seiler, Res. Lab., U.S. Air Force Academy, Colo. Spgs., CO. 80840

15 2. HF (restricted Hartree-Fock) the rigorous (*ab initio*, no adjustable parameters) method. The HF results were calculated using the GAUSSIAN® 90 program and the well-known 3-21g basis set. The 3-21g basis set is a valence double-zeta basis set. Gaussian 90, Revision J., available from Gaussian, Inc., Pittsburgh PA, 1990.

20 The 3-21G basis set is well known in the art, and is described in, for example, W. J. Hehre, L. Radom, P. v. R. Schleyer, and J. A. Pople, *Ab Initio Molecular Orbital Theory*, Wiley, New York, (1986); Pietro, W. J., et al., *J. Am. Chem. Soc.* 104, 5039-48 (1982); M. S. Gordon, et al, *J. Am. Chem. Soc.* 104, 2797-803 (1982); J. S. Binkley, et al., *J. Am. Chem. Soc.* 102, 939-47 (1980); K. D. Dobbs and W. J. Hehre, *J. Comput. Chem.* 8, 880-93 (1987); K. D. Dobbs and W. J. Hehre, *J. Comput. Chem.* 8, 861 (1987); K. D. Dobbs and W. J. Hehre, *J. Comput. Chem.* 9, 801 (1988); K. D. Dobbs and W. J. Hehre, *J. Comput. Chem.* 7, 359 (1986).

Example 1

30 A catalyst solution was prepared by combining 1 mL of a 0.005 M toluene solution of tris(pentafluorophenyl)borane with 1 mL of a 0.005 M toluene solution of [(tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl titanium $[(C_5Me_4)_2SiMe_2N(t-Bu)TiBz_2]$ (prepared by reaction of (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane titanium dichloride and benzyl lithium. The dichloride in turn was prepared by reaction of lithium 1,2,3,4-tetramethylcyclopentadienide with (N-tert-butylamino)(dimethyl)silane chloride, followed by conversion to the dilithium salt, reaction with $TiCl_3$ to form the closed ring structure (N-tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)titanium chloride, and oxidation of the metal center with methylene chloride to form (N-tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)titanium dichloride. The mixture was shaken for 10 seconds at 25 °C, giving a catalyst solution noticeably darker than the starting, red-orange, titanium containing solution.

Polymerization

40 The catalyst solution was combined with a mixture comprising 1 L of Isopar E™, 0.2 L of 1-octene, and ethylene (31 atmospheres, 3.1 MPa) in a 2 L reactor. The reactants were previously deaerated and purified and the reactor contents were heated to 130 °C. An immediate 7 °C rise in reactor temperature occurred. Ethylene was provided on demand at 3.1 MPa. After 10 minutes the reactor contents were removed and devolatilized giving 80.0 g of ethylene-octene copolymer having a micro-melt index of 0.104.

Example 2

50 A catalyst solution was prepared by combining 1 mL of a 0.005 M toluene solution of tris(pentafluorophenyl)borane with 1 mL of a 0.005 M toluene solution of (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl zirconium $[(C_5Me_4)_2SiMe_2N(t-Bu)Zrbz_2]$ (prepared according to the same technique as Example 1). The mixture was shaken for 10 seconds at 25 °C, giving a catalyst solution slightly darker than the starting, light yellow, zirconium containing solution.

55 Polymerization

The catalyst solution (10 μ mol in 2mL Isopar™ E) was combined with a mixture comprising 0.8 L of Isopar E™ and 0.4 liters of propylene in a 2 L reactor. The reactor contents were heated to 50 °C. After 45

minutes the reactor contents were removed and devolatilized giving 30.1 g of polypropylene having a micro-melt index of 24.3 and a syndiotactic index (measured at a racemic triad) of 83.5.

Examples 3-37

5

The metal complex for Examples 3-37 was (tert-butylamido)dimethyl(tetramethyl-5-cyclopentadienyl)-silane titanium dimethyl, $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$, and the Lewis acid was tris(perfluorophenyl)borane, $B(C_6F_5)_3$. The polymerization time for all examples was 10 minutes. The results for Examples 3-37 are shown in Table I.

10

15

20

25

30

35

40

45

50

55

Best Available Copy

Table I

<u>Ex</u>	<u>T(°C)</u>	<u>H₂ΔkPa</u>	<u>C₂H₄ MPa</u>	<u>1-octene (mL)</u>	<u>Lewis acid (μMole)</u>	<u>Ti (μMoles)</u>	<u>Yield, %</u>	<u>MI (12)</u>	<u>Density, g/mL</u>
3	204	300	3.45	0	15	10.00	15.1	37.9	-
4	190	340	3.45	0	9	6.00	18.7	27.54	-
5	190	0	3.45	0	9	6.00	6.3	0.04	-
6	190	170	3.45	0	9	6.00	25.8	5.5	-
7	176	300	3.45	0	6	4.00	30.2	10.6	-
8	210	170	3.45	0	15	10.00	8.6	21.23	-
9	190	170	3.45	0	9	6.00	14	5.23	-
10	204	50	3.45	0	15	10.00	7.1	1.6	-
11	170	170	3.45	0	6	4.00	40.6	1.99	-
12	190	170	3.45	0	9	6.00	17.1	3.54	-
13	190	170	3.45	0	9	6.00	16.7	5.34	-
14	176	50	3.45	0	6	4.00	26.2	0.2	-
15	190	170	3.45	0	9	6.00	20.4	4.34	-
16	170	0	3.45	0	6	4.00	28	0.04	-
17	210	0	3.45	0	15	10.00	1.1	-	-
18	163	340	3.28	55	1.25	1.25	22.4	3.54	0.9220
19	163	170	3.28	55	1.25	1.25	45.5	1.04	0.9173
20	150	170	3.28	55	1.25	1.25	77.3	1.35	0.9115

Table I (con't)

Ex	T(°C)	H ₂ ΔkPa	C ₂ H ₄ Ml ^{1/2}	1-octene (mL)	Lewis acid (μMole)	Ti (μMoles)	Yield, %	MI (12)	Density, g/mL
21	163	170	3.28	55	1.25	1.25	49.1	1.07	0.9189
22	170	280	3.28	28	1.25	1.25	30.1	1.93	0.9310
23	163	170	3.28	100	1.25	1.25	43.2	5.6	0.9077
24	163	170	3.28	55	1.25	1.25	10.2	0.76	0.9079
25	155	69	3.28	28	1.25	1.25	35.5	0.07	0.9190
26	163	170	3.28	55	1.25	1.25	39.7	1.44	0.9173
27	170	69	3.28	82	1.25	1.25	23.7	2.04	0.9125
28	170	"	3.28	28	1.25	1.25	22.9	0.19	0.9223
29	155	280	3.28	82	1.25	1.25	44	4.24	0.9116
30	163	170	3.28	10	1.25	1.25	16.1	0.15	0.9337
31	163	0	3.28	55	1.25	1.25	10.2	0.58	0.9154
32	163	170	3.28	55	1.25	1.25	30.8	1.14	0.9192
33	170	280	3.28	82	1.25	1.25	22.6	9.95	0.9206
34	155	69	3.28	82	1.25	1.25	42	1.01	0.9096
35	175	170	3.28	55	1.25	1.25	17.7	3.78	0.9214
36	163	170	3.28	55	1.25	1.25	32.1	0.81	0.9176
37	155	280	3.28	28	1.25	1.25	31.3	0.36	0.9266

Best Available Copy

and the solution was heated to the reaction temperature. The solution was then saturated with ethylene at 475 psig (3.38 MPa). Equimolar amounts of the metal complex, $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$ and the Lewis acid, $B(C_6F_5)_3$ were mixed in 2 mL of Isopar® E and this solution was transferred into the reactor to begin the polymerization. The reaction was allowed to proceed for 15 minutes with ethylene being supplied on demand at 475 psig (3.38 MPa). The propylene content of the polymer was determined by carbon NMR spectroscopy using the method of J.C. Randall, Rev. Macromo. Chem. Phys., 29(2&3), 201-317, (1989). The results are shown in Table II.

Table II

Ex	Propene g	Temp (°C)	H ₂ ΔkPa	Ti (μmol)	Yield, %	Melt Index (12)	Propylene Mol%	Density, g/mL
38	100	95	690	.500	70.9	3.551	30.7	0.8520
39	86	550	550	.375	109.0	0.671	40.0	0.8513
40	130	86	140	.325	98.1	0.184	41.2	0.8522
41	100	95	0	.325	71.7	0.063	31.9	0.8516
42	130	104	550	.750	99.5	6.984	50.2	0.8514
43	100	95	340	.375	92.8	0.956	46.0	0.8518
44	100	95	340	.375	88.7	0.777	38.0	0.8516
45	50	95	340	.375	79.1	0.372	24.2	0.8631
46	70	86	550	.375	94.7	1.098	30.0	0.8544
47	100	80	340	.300	96.8	0.261	34.3	0.8518
48	70	104	550	.500	75.6	2.122	30.0	0.8540
49	100	110	340	.750	91.6	4.093	38.2	0.8536
50	100	95	340	.500	96.5	1.203	38.1	0.8501
51	70	86	140	.250	72.8	0.000	28.2	0.8559
52	100	95	340	.325	79.2	0.796	35.8	0.8491
53	100	95	340	.325	82.3	0.674	37.5	0.8518
54	70	104	140	.750	92.6	0.830	32.9	0.8533
55	100	95	340	.325	82.5	0.733	35.2	0.8517
56	130	104	140	.500	84.1	1.697	43.2	0.8497
57	100	95	340	.325	83.1	0.503	36.8	0.8508

Examples 59 - 77

The procedure of Examples 3 - 37 was followed except that various amounts of styrene were added to the reactor followed by Isopar® E to make 1000 mL of total liquid volume. Various amounts of propylene were then added. The solution was heated to the reaction temperature. The solution is then saturated with ethylene at 480 psig (3.41 MPa). Equimolar amounts of the metal complex, $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$, and the Lewis acid, $B(C_6F_5)_3$ were mixed in 2 mL of Isopar® E and this solution was transferred into the reactor to begin the polymerization. The reaction was allowed to proceed for 10 minutes with ethylene being supplied on demand at 480 psig (3.41 MPa). The results are shown in Table III. Where provided, propylene and styrene contents were determined by carbon 13 NMR spectroscopy.

15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
93

was allowed to proceed for 10 minutes after the final catalyst addition with ethylene being supplied on demand at 475 psig (3.38 MPa) throughout the run. The results are shown in Table IV.

Table IV

Ex	Styrene (mL)	Temp (°C)	Hydrogen (kPa)	Catalyst (μmol)	Yield, g	Melt Index (I2)	Styrene Content (mole %)
78	125	145	0	5.0	24.0	0.209	0.8
79	75	145	76	5.0	44.8	0.436	0.5
80	225	145	76	7.5	37.5	2.117	1.5
81	234	136	110	7.5	59.8	1.884	1.7
82	175	145	69	7.5	52.5	1.471	1.3
83	175	145	"	7.5	52.0	1.352	1.4
84	234	154	28	7.5	34.4	2.447	1.5
85	116	136	110	5.8	65.1	0.739	-
86	275	145	69	7.5	46.2	2.055	1.9
87	175	160	"	7.5	31.1	7.111	1.2
88	175	130	"	3.0	46.3	0.335	-
89	116	154	"	7.5	49.2	4.061	1.0
90	234	154	"	7.5	39.8	9.417	1.6
91	175	145	140	7.5	55.1	3.494	-
92	175	145	69	7.5	53.1	1.144	-
93	116	154	28	7.5	46.4	0.710	0.8
94	175	145	69	7.5	52.6	1.134	1.4
95	234	136	28	5.0	45.5	0.270	-
96	175	145	69	7.5	52.2	1.185	-
97	175	145	0	7.5	50.2	0.465	-
98	175	145	69	7.5	51.3	1.126	-
99	75	145	"	7.5	63.0	0.489	0.6
100	116	136	28	5.0	52.5	0.115	-

50

Example 101

The polymerization procedure of Examples 3-37 was followed using 1.25 micromoles of (tert-butylamido)dimethyl(tetramethyl- η -5-cyclopentadienyl)silane titanium dibenzyl $[(C_5Me_4)SiMe_2N(t-Bu)]Ti$ bz₂ and 1.25 micromoles of the Lewis acid, $B(C_6F_5)_3$ mixed in 2 mL of Isopar® E. The reaction temperature was 160 °C. 10 g of propylene and 100 Δpsi (0.7 MPa) hydrogen were added. The ethylene pressure was 460 psig (3.3 MPa). The polymerization time was 15 minutes. 22.9 g of an ethylene / propylene copolymer

Best Available Copy

were isolated.

Example 102

5 The polymerization procedure of Example 101 was followed using 1.00 micromoles of $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$ and 1.00 micromoles of the Lewis acid $B(C_6F_5)_3$ mixed in 2 mL of Isopar® E. The reaction temperature was 90 °C. 1000 mL of Isopar® E and 200 mL of 1-octene were charged into the reactor and no hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 15 minutes. 85.9 g of an ethylene/ octene copolymer of approximately 0.87 g/mL density and melt index (I_2) of
10 0.3 was isolated.

Example 103

Polymerization using (tert-butylamido)dimethyl(tetrahydrofluorene)silane titanium dimethyl metal derivative

15 Preparation of tetrahydrofluorene

20 15g (90.2 mmol) of fluorene was dissolved in 200ml of a tetrahydrofuran (THF)/ ethylene diamine solution (1:1 ratio). The solution was cooled in a ice bath and with stirring 3.13g of lithium (451.2 mmol) was added in small portions. After all the lithium had been added the solution was stirred for 2 h with consequent dissolution of the lithium metal. The resulting solution was then poured into a HCl/ice mixture. The solution was then extracted with diethyl ether. The organic washings were combined, washed with water and dried over $MgSO_4$. The solution was filtered and the solvent removed on a rotary evaporator. The crude material was then purified by dissolving in hexane and passing through a silica gel column to give
25 11.4g (75 percent yield) of product after solvent removal.

Preparation of lithium tetrahydrofluoreneide

30 10 g of tetrahydrofluorene (59 mmol) was dissolved in 75 ml of pentane. To this solution 21 ml of n-butyl lithium (n-BuLi) (2.65 M) was added dropwise over a 20 min period. The solution was stirred overnight with deposition of a white solid. The solid was collected by filtration, washed with pentane and dried under reduced pressure to give 7.14g (70 percent yield) of product.

Preparation of (N-t-butylamino)(dimethyl)(tetrahydrofluorenyl)silane

35 5.78 g (34.9 mmol) of $CiSiMe_2NHCMe_3$ (prepared according to the method described in J. Prakt. Chem., 24(3-4), 226-30 (1964)) was added to 100 ml of THF. To this solution 6.15 g (34.9 mmol) of lithium tetrahydrofluoreneide was added. The solution was then brought to reflux for 10 min and the solution cooled to room temperature. Gas chromatographic (GC) analysis showed the reaction to be complete. The solvent
40 was then removed under reduced pressure, the residue extracted with pentane, filtered and the solvent again removed under reduced pressure to give 9.80 g of product (94 percent yield).

Preparation of dilithium (N-t-butylamido)(dimethyl)(tetrahydrofluorenyl)silane

45 9.80g (32.8 mmol) of (N-t-butylamino)(dimethyl)(tetrahydrofluorenyl)silane was dissolved in 100ml of diethylether. To this solution 26.6 ml (70.6 mmol) of nBuLi (2.65 M) was added dropwise. Upon complete addition of the nBuLi the solution was stirred for 2 h whereupon the solvent was removed under reduced pressure to give an oily orange residue which solidified upon trituration with pentane to give 11.86 g (98 percent yield) of a yellow solid which was identified by nuclear magnetic resonance spectroscopy (NMR) as
50 an etherate adduct (3/4 Et_2O per molecule) of dilithium (N-t-butylamino)(dimethyl)(tetrahydrofluorenyl)silane.

Preparation of $[(N-t\text{-butylamido})(dimethyl)(tetrahydrofluorenyl)silane]titanium$ dichloride ($[(t\text{-tetrahydrofluorenyl})SiMe_2N(t\text{-Bu})]TiCl_2$)

55 6 g (16.1 mmol) of $TiCl_3(THF)_3$ was dissolved in 75 ml of THF. To this solution 5.92 g (16.1 mmol) of dilithium (N-t-butylamido)(dimethyl)(tetrahydrofluorenyl)silane(3/4 Et_2O) was added as a solid with stirring. The solution was then stirred for 45 min, after this time period $PbCl_2$ (2.25g, 8.1 mmol) was added and the solution stirred for 45 minutes. The THF was then removed under reduced pressure. The residue was then

extracted with toluene, the solution filtered and the toluene removed under reduced pressure. The residue was then triturated with pentane and the solution cooled to -20 °C for 3 hours. The red precipitate was collected via filtration and washed with cold pentane and dried under vacuum to yield 5.00 g (75 percent yield) of product.

5 Preparation of [(N-t-butylamido)(dimethyl)(tetrahydrofluorenyl)ilane]titanium dimethyl [(tetrahydrofluorenyl)-SiMe₂N(t-Bu)]Ti(CH₃)₂

10 5.0g of [(N-t-butylamido)(dimethyl)(tetrahydrofluorenyl)ilane]titanium dichloride (12 mmol) was suspended in 100 ml of Et₂O. To this suspension 8.40 ml of methyl magnesium iodide (MeMgI) (3.0 M in diethyl ether, Et₂O) was added dropwise with stirring over a 20 min period. Upon completion of the addition of the MeMgI the solution was stirred for 40 minutes. After this time period the Et₂O was removed under reduced pressure and the residue extracted with pentane, the solution filtered and the filtrate evaporated to dryness under reduced pressure to give 3.48 g (77 percent yield) of product.

15 Polymerization

20 The polymerization procedure of Example 102 was followed using 2.00 micromoles of [- (tetrahydrofluorenyl)SiMe₂N(t-Bu)]TiMe₂ and 2.00 micromoles of the Lewis acid, B(C₆F₅)₃ mixed in 2 mL of Isopar® E. The reaction temperature was 130 °C. 808 g of Isopar® E and 100 g of 1-octene are charged into the reactor. No hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 15 minutes. 41.1 g of an ethylene/ octene copolymer were isolated.

Example 104.

25 The procedure of Example 103 was followed except that 2.50 micromoles of [(tetrahydrofluorenyl)SiMe₂N(t-Bu)]TiMe₂ and 2.50 micromoles of the Lewis acid B(C₆F₅)₃, were mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 150 °C. 829 g of Isopar® E and 29 g of 1-octene are charged into the reactor and no hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 15 minutes. 11.4 g of an ethylene/ octene copolymer were isolated.

Example 105.

30 Polymerization using (tert-butylamido)dimethyl(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)ilane titanium dimethyl metal derivative

Preparation of 4,5,6,7-tetrahydro-1-methyl-indan-3-one

35 Cyclohexene (27.3g, 0.33 mol), crotonic acid (28.7g, 0.33mol) and polyphosphoric acid (300ml) were mechanically stirred under a nitrogen atmosphere at 60 °C for 30 minutes. The slurry was poured into water and the aqueous solution extracted with diethyl ether. The diethyl ether extract was washed successively with a 10 percent NaHCO₃ solution and a saturated NaCl solution. The organic extract was then dried over anhydrous MgSO₄. The solution was then filtered and the solvent removed under reduced pressure. The crude product was then purified via vacuum distillation (bp 87-92 °C at 5 torr, 0.7 kPa) to give 32.6g (66 percent) of purified material.

40 Preparation of 7,9 dimethylbicyclo-[4.3.0]-nona-1(6),7-diene

45 Methyl lithium (1.5M, 96ml) was added dropwise to a solution of 4,5,6,7-tetrahydro-1-methyl-indan-3-one (17.7g, 0.118 mol) in 50ml of diethyl ether under an argon atmosphere whereupon the reaction mixture was refluxed for 18 hours. The mixture after this time period was hydrolyzed and the reaction mixture extracted with diethyl ether. The ether extracts were dried over anhydrous MgSO₄ and filtered. To the ether solution, 0.5ml of 6M HCl was added and the solution stirred for one hour. After this time period the ether solution was washed with water, dried over anhydrous MgSO₄, filtered and concentrated. Distillation at reduced pressure afforded 8.0g (45 percent) of product.

Best Available Copy

Preparation of lithium 1,3-dimethyl-5,6,7,8-tetrahydroindenide

7.9 dimethylbicyclo-[4.3.0]-nona-1(6),7-diene (5.0g, 33.5 mmol) was added to 100ml of pentane. To this solution n-BuLi in pentane (2.7M, 13ml) was added dropwise and the mixture stirred for 12 hours. The 5 resulting white precipitate was collected via filtration, washed with pentane and dried under reduced pressure to give 5.02g (97 percent) of product.

Preparation of (N-t-butylamino)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane

10 0.77g of $\text{ClSiMe}_2\text{NHCMe}_3$ (4.67 mmol) was added to 50 ml of THF. To this solution 0.75g (4.67 mmol) of lithium 1,3-dimethyl-5,6,7,8-tetrahydroindenide was added. The solution was then brought to reflux for 10 min and the solution was then cooled to room temperature. Gas-Chromatogram (GC) analysis showed the reaction to be complete. The solvent was then removed under reduced pressure, the residue extracted with pentane, filtered and the solvent again removed under reduced pressure to give 1.21g of product (94 15 percent yield).

Preparation of dilithium (N-t-butylamido)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane

1.21g (4.36 mmol) of (N-t-butylamino)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane 20 were dissolved in 100ml of diethylether. To this solution 5.72ml (9.15 mmol) of nBuLi (1.6 M in pentane) was added dropwise. Upon complete addition of the nBuLi the solution was stirred for 2 hours whereupon the solvent was removed under reduced pressure to give an oily yellow residue which solidified upon trituration with pentane to give 1.00g (79 percent yield) of a tan solid product.

25 Preparation of [(N-t-butylamido)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane] titanium dichloride (- [(1,3-dimethyl-tetrahydroindenyl)SiMe₂N(t-Bu)]TiCl₂)

0.64g (1.72 mmol) of $\text{TiCl}_3(\text{THF})_3$ was dissolved in 75ml of THF. To this solution 0.50g (1.72 mmol) of dilithium (N-t-butylamido)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane was added as a solid with 30 stirring. The solution was then stirred for 45 min, after this time period PbCl_2 (0.239g, 0.86 mmol) was added and the solution stirred for 45 minutes. The THF was then removed under reduced pressure. The residue was then extracted with toluene, the solution filtered and the toluene removed under reduced pressure. The residue was then triturated with pentane and the solution cooled to -20 °C for 3 hours. The product was collected via filtration and washed with cold pentane and dried under vacuum to yield 0.32g 35 (47 percent yield) of product.

Preparation of [(N-t-Butylamido)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane] titanium dimethyl (- [(1,3-dimethyl-tetrahydroindenyl)SiMe₂N(t-Bu)]Ti(CH₃)₂)

40 0.32g of (N-t-butylamido)(dimethyl)(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)silane titanium dichloride (0.81 mmol) was suspended in 40 ml of Et_2O . To this suspension 0.56 ml of MeMgI (3.0 M in diethyl ether) was added dropwise with stirring over a 20 minute period. Upon completion of the addition of the MeMgI , the solution was stirred for 40 minutes. After this time period the Et_2O was removed under reduced pressure and the residue extracted with pentane, the solution filtered and the filtrate evaporated to dryness 45 under reduced pressure to give 0.21g (73 percent yield) of product.

Polymerization

50 The procedure of Example 103 was followed except that 0.50 micromoles of [(1,3-dimethyltetrahydroindenyl)SiMe₂N(t-Bu)]TiMe₂ and 0.50 micromoles of the Lewis acid $\text{B}(\text{C}_6\text{F}_5)_3$, mixed in 2 mL of Isopar® E were used to form the catalyst/ cocatalyst mixture. The reaction temperature was 120 °C. 797 g of Isopar® E and 61 g of 1-octene are charged into the reactor and 20 Δpsi (0.14 ΔMPa) of hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 10 minutes. 29.2 g of an ethylene/ octene copolymer were isolated. The micro-melt index (I₂), was 0.975.

Example 106.

The procedure of Example 105 was followed except that 0.10 micromoles of [(1,3-dimethyltetrahydroindenyl)SiMe₂N(t-Bu)]TiMe₂ and 0.10 micromoles of the Lewis acid, B(C₆F₅)₃ mixed in 2 mL of Isopar® E were used to form the catalyst mixture. The reaction temperature was 90 °C. 715 g of Isopar® E and 143 g of 1-octene were charged into the reactor and 10 Δpsi (0.07 MPa) of hydrogen was added. The ethylene pressure was 500 psig (3.45 MPa). The polymerization time was 10 minutes. 64.5 g of an ethylene/ octene copolymer were isolated. The melt index (I₂) was 0.346.

10 Example 107.

The procedure of Example 106 was followed except that 0.025 micromoles of [(C₅Me₄)SiMe₂N(t-Bu)]-TiMe₂ and 0.025 micromoles of the Lewis acid, B(C₆F₅)₃ mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 50 °C. 679 g of Isopar® E and 179 g of 1-octene were charged into the reactor and 20 Δpsi (0.14 MPa) of hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 60 minutes. 40.7 g of an ethylene/ octene copolymer were isolated. The melt index, I₂, was 0.166.

Example 108.

20 The procedure of Example 107 was followed except that 2.00 micromoles of [(tetrahydrofluorenyl)-SiMe₂N(t-Bu)]Tibz₂ (prepared by reacting [(N-t-butylamido)(dimethyl)tetrahydrofluorenyl]silane] titanium dichloride with benzyl magnesium chloride) and 2.00 micromoles of the the Lewis acid, B(C₆F₅)₃ mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 150 °C. 822 g of Isopar® E and 36 g of 1-octene were charged into the reactor and 10 Δpsi (0.07 MPa) of hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 15 minutes. 20.1 g of an ethylene/ octene copolymer were isolated. The melt index, I₂, was 0.327.

Example 109.

30 The procedure of Example 108 was followed except that 2.00 micromoles of [(tetrahydrofluorenyl)-SiMe₂N(t-Bu)]Tibz₂ and 2.00 micromoles of the Lewis acid, B(C₆F₅)₃ mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 150 °C. 822 g of Isopar® E and 36 g of 1-octene are charged into the reactor and 10 Δpsi (0.07 MPa) of hydrogen was added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 15 minutes. 20.1 g of an ethylene/ octene copolymer were isolated. The melt index, I₂, was 0.327.

Example 110.

40 Polymerization using (n-tertbutylamido)dimethyl(η⁵-tertbutylcyclopentadienyl)silane titanium dimethyl metal derivative

Lithium t-butylcyclopentadienide

45 To a solution of 4.18 g (39.4 mmol) 6,6-dimethylfulvene in 80 mL diethylether at 0 °C were added 22.9 mL of a 1.72 M (39.4 mmol) methyl lithium solution in ether. The resulting slurry was stirred several days, then filtered, washed with pentane and dried under vacuum.

(N-t-butylamino)(dimethyl)(t-butylcyclopentadienyl)silane

50 To a solution of 3.35 g (20.2 mmol) (N-t-butylamino)(chloro)dimethylsilane in 75 mL THF was added 3.58 g (17.7 mmol) lithium t-butylcyclopentadienide etherate. The reaction mixture was stirred several hours. The solvent was removed, the residue was extracted with pentane and filtered. The pentane was removed in vacuo to give the product as a pale yellow oil. The yield was 2.87 g, 64.6 percent.

55

Best Available Copy

Dilithium[(N-t-butylamido)(dimethyl)(t-butylcyclopentadienyl)silane

To a solution of 2.87 g (11.4 mmol) (N-t-butylamino)(dimethyl)(t-butylcyclopentadienyl)silane in 70 mL ether was added 15.8 mL of 1.48 M (23.4 mmol) butyl lithium in hexane. The resulting clear solution was 5 stirred overnight. The solvent was removed under reduced pressure. Yield was 107 percent of impure product.

[(N-t-butylamido)(dimethyl)(η -t-butylcyclopentadienyl)silane]titanium dichloride $\{[(t\text{-Butyl-C}_5\text{H}_3)\text{SiMe}_2\text{N}(t\text{-Bu})]\text{TiCl}_2\}$

10 In a flask were combined 0.60 g (2.27 mmol) dilithium[(N-t-butylamido)(dimethyl)(t-butylcyclopentadienyl)silane and 0.84 g (2.27 mmol) $\text{TiCl}_3(\text{THF})_3$ as solids. To this was added 40 mL THF. The resulting dark violet solution was stirred for 10 minutes, then 0.35 g (1.25 mmol) PbCl_2 was added. The reaction mixture was stirred for less than one hour, the deep orange-brown reaction mixture was filtered, and the 15 solvent removed under reduced pressure. The residue was extracted with pentane and the solution filtered and concentrated until solid material began to form. The slurry was cooled overnight in a freezer, the yellow product was collected on a frit, washed with pentane and dried under reduced pressure. The yield was 0.58 g, 69.6 percent.

20 $\{[(N\text{-t-butylamido})(\text{dimethyl})(\eta\text{-t-butylcyclopentadienyl})\text{silane}]\text{titanium dimethyl } \{[(t\text{-Butyl-C}_5\text{H}_3)\text{SiMe}_2\text{N}(t\text{-Bu})]\text{Ti}(\text{CH}_3)_2\}$

A 0.80 mL solution of 2.78 M (2.22 mmol) methyl magnesium iodide in 15 mL ether was slowly added over 20 minutes to 0.41 g (1.11 mmol) $\{[(N\text{-t-butylamido})(\text{dimethyl})(\eta\text{-t-butylcyclopentadienyl})\text{silane}]\text{titanium dichloride}$ in 15 mL ether. The solution was stirred 20 minutes, then the solvent was removed. The residue was extracted with pentane and the resulting solution was filtered, then concentrated to an oil which crystallized on standing. Yield was 0.34 g, 94.6 percent.

Polymerization

30 The general polymerization procedure of Example 109 was followed using 0.25 micromoles of $[(t\text{-Butyl-C}_5\text{H}_3)\text{SiMe}_2\text{N}(t\text{-Bu})]\text{TiMe}_2$ and 0.25 micromoles of the Lewis acid, $\text{B}(\text{C}_6\text{F}_5)_3$ mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 80°C. 1000 mL of Isopar® E, 100 g of propylene and 50 Δpsi (0.34 MPa) of hydrogen were added. The ethylene pressure was 475 psig (3.38 MPa). The polymerization time was 10 minutes. 6.3 g of an ethylene/ propylene copolymer was isolated. The melt index, I_2 , was 1.291. The density was 0.8868 g/mL.

Example 111. Ethylene / norbornylene copolymer

40 The general polymerization procedure of Example 109 was followed using 1.25 micromoles of $[(\text{C}_5\text{Me}_4)\text{SiMe}_2\text{N}(t\text{-Bu})]\text{TiMe}_2$ and 1.87 micromoles of the Lewis acid $\text{B}(\text{C}_6\text{F}_5)_3$ mixed in 2 mL of Isopar® E were used to form the catalyst. The reaction temperature was 140°C. 808 g of Isopar® E, 19.5 g of norbornene and 25 Δpsi (0.17 MPa) of hydrogen were added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 10 minutes. 41.3 g of a random ethylene / norbornene copolymer was isolated. The melt index (I_2) was 0.587. The polymer contained 2.38 weight percent norbornene as determined by ^{13}C NMR.

Example 112. Ethylene / norbornene copolymer

50 The procedure of Example 111 was followed using 1.25 micromoles of $[(\text{C}_5\text{Me}_4)\text{SiMe}_2\text{N}(t\text{-Bu})]\text{TiMe}_2$ and 1.87 micromoles of the Lewis acid, $\text{B}(\text{C}_6\text{F}_5)_3$, mixed in 2 mL of Isopar® E to form the catalyst. The reaction temperature was 140°C. 758 g of Isopar® E, 39.0 g of norbornene and 25 Δpsi (0.17 MPa) of hydrogen were added. The ethylene pressure was 500 psig (3.55 MPa). The polymerization time was 10 minutes. 38.1 g of a random ethylene / norbornene copolymer were isolated. The melt index (I_2) was 1.52. 55 The polymer contained 4.33 weight percent norbornene as determined by ^{13}C NMR.

Best Available Copy

Example 113. Ethylene / norbornene copolymer

The procedure of Example 112 was followed using 2.00 micromoles of $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$ and 3.00 micromoles of the Lewis acid, $B(C_6F_5)_3$, mixed in 2 mL of Isopar® E to form the catalysts /

5 cocatalyst mixture. The reaction temperature was 50°C. 1200 mL of a solution containing 334.6 g of norbornene in Isopar® E and 5 Δpsi (0.03 MPa) of hydrogen were added. The ethylene pressure was 100 psig (0.79 MPa). The polymerization time was 30 minutes. 22.9 g of a random ethylene / norbornene copolymer were isolated. The melt index, I_2 , was 1.43. The polymer contained 73.78 weight percent norbornene as determined by ^{13}C NMR. The polymer Tg was 83.8°C.

10

Example 114.

Polymerization using phenyl bis(perfluorophenyl)borane Lewis acid

15 Preparation of $B(C_6F_5)_2(C_6H_5)$

A 250 mL flask was evacuated, cooled to -78°C and charged with 120 mL of mixed hexane solvent, vacuum transferred from sodium benzophenone ketyl. The flask was backfilled with argon, to 0.11 MPa pressure, and bromopentafluorobenzene (deoxygenated by sparging with nitrogen, 10.00 grams, 40.5 mmol)

20 was added via a syringe. Agitation of the mixture was begun (magnetic stir bar), giving a clear, colorless solution, to which was added n-butyllithium (16.2 mL of 2.5M hexane solution, 40.5 mmol) via syringe. As the n-butyllithium solution was added, a clear colorless solid separated from the mixture. This slurry was allowed to stir at -78°C for 70 minutes and then dichlorophenylboron (3.22g, 20.3 mmol, 0.50 equivalents) was added from a syringe. After stirring for an additional 30 minutes at -78°C, no change was noted and 25 the mixture were allowed to warm to ambient temperature. As the mixture warmed, a thick white precipitate formed. After stirring at 22°C for 15 minutes the flask was opened to vacuum and the volume of the mixture was reduced to 50 mL. The mixture was filtered, the solid extracted with three 20 mL portions of mixed hexane solvent and the filtrate was reduced to 20 mL under reduced pressure. The resulting solution was cooled to -78°C, giving a very thick slurry of colorless, crystalline solid. The slurry was thinned by 30 addition of 20 mL of hexane. The solid was collected by filtration and dried under reduced pressure. Yield was 4.86g, 57 percent.

Polymerization

35 The polymerization procedure of Examples 3 - 37 was followed except that 850 mL of Isopar® E is added to the reactor followed by 20 g of propylene. 25 Δpsi (0.17 MPa) of hydrogen were then added and the solution heated to 130°C. The solution was then saturated with ethylene at 500 psig (3.55 MPa). 10 micromoles of the metal complex $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$ and 10 micromoles of the Lewis acid, $B(C_6F_5)_2(C_6H_5)$,

40 were mixed in 2 mL of Isopar® E and this solution was transferred into the reactor to begin the polymerization. The reaction was allowed to proceed for 15 minutes with ethylene being supplied on demand at 500 psig (3.55 MPa). 2.8 g of an ethylene/ propylene copolymer were obtained. The melt index, I_2 , was 7.52.

Example 115 Ethylene / ethylidene norbornene copolymer

45 The procedure of Example 111 was followed using two consecutive additions of a catalyst solution prepared by mixing 5.0 micromoles of $[(C_5Me_4)SiMe_2N(t-Bu)]TiMe_2$ and 5.0 micromoles of the Lewis acid, $B(C_6F_5)_3$, mixed in 2 mL of Isopar® E. The reaction temperature was 130°C. 1200 mL of a solution containing 50 mL of 5-ethylidene-2-norbornene in Isopar® E and 50 psi (0.34 MPa) hydrogen were added. 50 The ethylene pressure was 475 psig (3.38 MPa). The polymerization time was 20 minutes. 59.9 g of an ethylene / 5-ethylidene-2-norbornene copolymer was isolated. The melt index, I_2 , was 1.55. The polymer contains 9.06 weight percent 5-ethylidene-2-norbenene as determined by ^{13}C NMR.

Example 116

55


Various Lewis acids are tested for Lewis acidity for use in preparation of catalysts according to the present invention. Acidity values and the techniques employed in determining such values are contained in Table V.

Table V

Run	Lewis Acid	Acidity (Kcal/mole)	Base
1	phenylbis(perfluorophenyl)borane	0.0 ^{1,2,3}	CH ₃ ⁻ or NH ₃
2	tris(2,3,5,6-tetrafluorophenyl)borane	-2.1 ²	CH ₃ ⁻
3	tris(3,4,5-trifluorophenyl)borane	-5.2 ¹	"
4	tris(3,4,5-trifluorophenyl)aluminum	-11.2 ²	"
5	tris(1,2,2-trifluoroethyl)borane	-12.3 ¹	"
6	tris(2,3,4,5-tetrafluorophenyl)borane	-15.2 ²	"
7	tris(perfluorophenyl) borate ⁴	-17.5 ¹	"
8	tris(perfluorophenyl)borane	-17.8 ^{1,5}	"
9	1,3,5-cyclohexanetriol borate	-22.2 ¹	NH ₃
10	1,1,1-trimethylethane borate	-25.1 ¹	"
1.	HF/3-21g method		
2.	AM1 method		
3.	Lewis acidity according to Childe's technique, $\Delta\delta$, is 0.77 ppm. Relative acidity = 0.0 ppm		
4.	B(OC ₆ F ₅) ₃		
5.	Lewis acidity according to Childe's technique, $\Delta\delta$, is 1.10 ppm. Relative acidity = 0.33 ppm		

Claims

1. A process for preparing a catalyst having a limiting charge separated structure corresponding to the formula II:

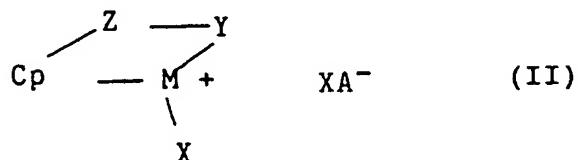

wherein:

M is a metal of Group 4 or the Lanthanide series of the Periodic Table of the Elements;

Cp is a substituted cyclopentadienyl group or derivative thereof that is π -bound to M and substituted at least by Z;


Z is a divalent moiety comprising oxygen, sulfur, boron, or a member of Group 14 of the Periodic Table of the Elements;

Y is a ligand group comprising nitrogen, phosphorus, oxygen or sulfur or optionally Z and Y together form a fused ring system;

X independently each occurrence is hydride or a hydrocarbyl, silyl or germyl group having up to 20 carbon, silicon or germanium atoms; and

A⁻ is a non-coordinating, compatible anion of a Lewis acid, A, having relative Lewis acidity greater than or equal to that of phenylbis(perfluorophenyl)borane, the steps of the process comprising

contacting a derivative of a Group 4 or Lanthanide metal corresponding to the formula I:

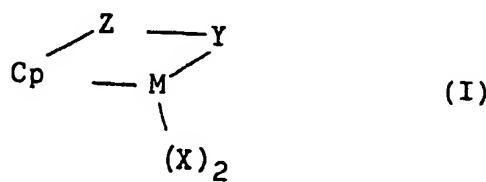


wherein

M, Cp, Z, Y, and X are as previously defined,
with the Lewis acid, A.

15

2. A process as claimed in Claim 1 wherein M is titanium or zirconium.
3. A process as claimed in Claim 1 or Claim 2, wherein -Z-Y- is an amidosilane or amidoalkane group.
- 20 4. A process as claimed in Claim 3, wherein the derivative of formula I corresponds to the formula III:

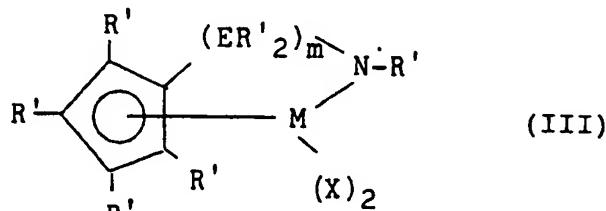

wherein:

M is titanium or zirconium, bound to an η^5 -cyclopentadienyl group;

35 R' each occurrence is independently selected from hydrogen, silyl, alkyl, aryl and combinations thereof having up to 20 carbon or silicon atoms, and optionally two or more R' groups on the cyclopentadienyl group may form a fused ring system;

E is silicon or carbon;

40 X independently each occurrence is hydride, trimethylsilyl, alkyl, aryl or halogen substituted aryl of up to 20 carbons; and

m is 1 or 2.

5. A process as claimed in Claim 4, wherein -(ER')_m-NR'- has up to 20 nonhydrogen atoms.
6. A process as claimed in Claim 5, wherein -(ER')_m-NR'- is (tert-butyl)(dimethylsilyl) or (tert-butyl)-1-ethan-2-yl.
- 45 7. A process as claimed in any one of the preceding claims, wherein X is hydride or C₁-C₁₀ hydrocarbyl.
8. A process as claimed in Claim 7, wherein X is methyl or benzyl.
- 50 9. A process as claimed in Claim 8, wherein R' each occurrence in the cyclopentadienyl group is hydrogen or C₁-C₄ alkyl and optionally two or more of said R' together with the cyclopentadienyl group form a tetrahydroindenyl or tetrahydrofluorenyl group, and R' on the nitrogen atom is tert-butyl.
- 55 10. A process as claimed in Claim 4, wherein the R' on the amido group is methyl, ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), norbornyl, benzyl, or phenyl; the cyclopentadienyl group is cyclopentadienyl, indenyl, tetrahydroindenyl, fluorenyl, tetrahydrofluorenyl, or octahydrofluorenyl; R' on the foregoing cyclopentadienyl groups each occurrence is hydrogen, methyl,

ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), norbornyl, benzyl, or phenyl; and X is methyl, neopentyl, trimethylsilyl, norbornyl, benzyl, methylbenzyl, phenyl, or pentfluorophenyl.

5 11. A process as claimed in any one of the preceding claims wherein the Lewis acid is a boron compound lacking in halogen moieties directly attached to the boron.

10 12. A process as claimed in any one of the preceding claims, wherein the Lewis acid is selected from tris(pentafluorophenyl)borane, tris(2,3,5,6-tetrafluorophenyl)borane, tris(2,3,4,5-tetrafluorophenyl)borane, tris(3,4,5-trifluorophenyl)borane, tris(1,2,2-trifluoroethenyl)borane, phenylbis(perfluorophenyl)borane, tris(3,4,5-trifluorophenyl)aluminum, tris(perfluorophenyl) borate, 1,3,5-cyclohexanetriol borate, and 1,1,1-trimethylolethane borate.

15 13. A process as claimed in Claim 12, wherein the Lewis acid is tris(pentafluorophenyl)borane.

14. A process as claimed in Claim 13, wherein the derivative of formula I is selected from: (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl zirconium; (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl titanium; (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane titanium dimethyl; (N-tert-butylamido)dimethyl(tetrahydrofluorenyl)silane titanium dimethyl; (N-tert-butylamido)dimethyl(1,3-dimethyl-5,6,7,8-tetrahydro-indenyl)silane titanium dimethyl; (tert-butylamido)dimethyl(tetrahydrofluorenyl)silane titanium dibenzyl; and (tert-butylamido)dimethyl(tert-butyl- η^5 -cyclopentadienyl)silane titanium dimethyl.

25 15. A process as claimed in any one of the preceding claims, wherein the derivative of formula I and the Lewis acid are contacted in a solvent selected from C₅-C₁₀ alkanes or cycloalkanes or mixtures thereof at 25 °C to 50 °C.

30 16. A process as claimed in any one of the preceding claims, wherein the derivative of formula I and the Lewis acid are contacted in situ during an addition polymerization reaction.


17. A process as claimed in any one of the preceding claims, wherein the derivative of formula I and the Lewis acid are contacted at an equivalent ratio of 0.1:1 to 10:1.

35 18. A process as claimed in Claim 17, wherein said ratio is 0.2:1 to 5:1.

19. A process as claimed in Claim 1, wherein the catalyst is used in a homogenous manner.

20. A process as claimed in Claim 1, wherein the catalyst is used on a support.

40 21. A catalyst having a limiting charge separated structure corresponding to the formula II:

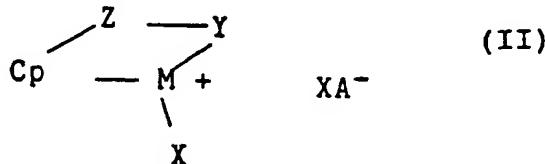

50

wherein:

M is a metal of Group 4 or the Lanthanide series of the Periodic Table of the Elements;

Cp is a substituted cyclopentadienyl group or derivative thereof that is π -bound to M and substituted at least by Z;

55 Z is a divalent moiety comprising oxygen, sulfur, boron, or a member of Group 14 of the Periodic Table of the Elements;

Y is a ligand group comprising nitrogen, phosphorus, oxygen or sulfur or optionally Z and Y together form a fused ring system;

X independently each occurrence is hydride or a hydrocarbyl, silyl or germyl group having up to 20 carbon, silicon or germanium atoms; and

A⁻ is a non-coordinating, compatible anion of a Lewis acid, A, having relative Lewis acidity greater than or equal to that of phenylbis(perfluorophenyl)borane.


5

22. A catalyst as claimed in Claim 21, wherein M is titanium or zirconium.

23. A catalyst as claimed in Claim 21 or Claim 22, wherein -Z-Y- is an amidosilane or amidoalkane group.

10 24. A catalyst as claimed in Claim 23, wherein the catalyst has the formula IIIA:

15

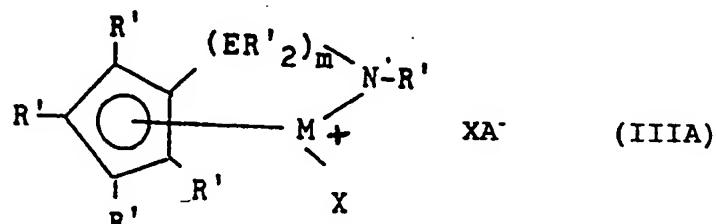

20

wherein:

A⁻ is as defined in Claim 21;

M is titanium or zirconium, bound to an η^5 -cyclopentadienyl group;

25 R' each occurrence is independently selected from hydrogen, silyl, alkyl, aryl and combinations thereof having up to 20 carbon or silicon atoms, and optionally two or more R' groups on the cyclopentadienyl group may form a fused ring system;

E is silicon or carbon;

30 X independently each occurrence is hydride, trimethylsilyl, alkyl, aryl or halogen substituted aryl of up to 20 carbons; and

m is 1 or 2.

25. A catalyst as claimed in Claim 24, wherein -(ER')_m-NR'- has up to 20 nonhydrogen atoms.

35 26. A catalyst as claimed in Claim 25, wherein -(ER')_m-NR'- is (tert-butyl)(dimethylsilyl) or (tert-butyl)-1-ethan-2-yl.

27. A catalyst as claimed in any one of Claims 21 to 26, wherein X is hydride or C₁-C₁₀ hydrocarbyl.

40 28. A catalyst as claimed in Claim 27, wherein X is methyl or benzyl.

29. A catalyst as claimed in Claim 28, wherein R' each occurrence in the cyclopentadienyl group is hydrogen or C₁-C₄ alkyl and optionally two or more of said R' together with the cyclopentadienyl group form a tetrahydroindenyl or tetrahydrofluorenyl group, and R' on the nitrogen atom is tert-butyl.

45

30. A catalyst as claimed in Claim 24, wherein the R' on the amido group is methyl, ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), norbornyl, benzyl, or phenyl; the cyclopentadienyl group is cyclopentadienyl, indenyl, tetrahydroindenyl, fluorenyl, tetrahydrofluorenyl, or octahydrofluorenyl; R' on the foregoing cyclopentadienyl groups each occurrence is hydrogen, methyl, ethyl, propyl, butyl, pentyl, hexyl, (including branched and cyclic isomers), norbornyl, benzyl, or phenyl; and X is methyl, neopentyl, trimethylsilyl, norbornyl, benzyl, methylbenzyl, phenyl, or pentafluorophenyl.

55 31. A catalyst as claimed in any one of Claims 21 to 30, wherein A⁻ is derived from a boron compound lacking in halogen moieties directly attached to the boron.

32. A catalyst as claimed in any one of Claims 21 to 31, wherein A⁻ is derived from tris-(pentafluorophenyl)-borane, tris(2,3,5,6-tetrafluoro-phenyl)borane, tris(2,3,4,5-tetrafluorophenyl)borane, tris(3,4,5-

Best Available Copy

trifluorophenyl)borane, tris(1,2,2-trifluoro-ethenyl)borane, phenylbis(perfluorophenyl)borane, tris-(3,4,5-trifluorophenyl)aluminum, tris(perfluorophenyl) borate, 1,3,5-cyclohexanetriol borate, or 1,1,1-trimethylolethane borate.

5 33. A catalyst as claimed in Claim 32, wherein A⁻ is derived from tris(pentafluorophenyl)borane.

34. A catalyst as claimed in Claim 33, wherein the catalyst is derived from:
 (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl zirconium;
 (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane dibenzyl titanium;
 10 (tert-butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silane titanium dimethyl;
 (N-tert-butylamido)dimethyl(tetrahydrofluorenyl)silane titanium dimethyl;
 (N-tert-butylamido)dimethyl(1,3-dimethyl-5,6,7,8-tetrahydro-indenyl)silane titanium dimethyl;
 (tert-butylamido)dimethyl(tetrahydrofluorenyl)silane titanium dibenzyl; or
 (tert-butylamido)dimethyl(tert-butyl- η^5 -cyclopentadienyl)silane titanium dimethyl.


15 35. A catalyst as claimed in Claim 21 including a support.

36. The use of a catalyst as claimed in any one of Claims 21 to 35 as an addition polymerization catalyst.

20 37. An addition polymerization process for preparing a polymer by contacting one or more addition polymerizable monomers with a coordination polymerization catalyst under addition polymerization conditions, characterized in that the catalyst is as claimed in any one of Claims 21 to 35.


Patentansprüche

25 1. Ein Verfahren zur Herstellung eines Katalysators, der eine Grenzstruktur mit Ladungstrennung aufweist, die der Formel II entspricht:

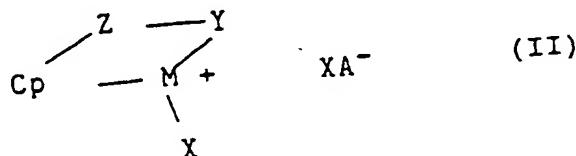

35

worin M ein Metall der Gruppe 4 oder der Lanthanidenreihe des Periodensystems der Elemente ist;
 Cp eine substituierte Cyclopentadienylgruppe oder ein Derivat davon ist, die an das Metall π -gebunden ist und wenigstens durch Z substituiert ist;
 40 Z eine divalente Einheit ist, die Sauerstoff, Schwefel, Bor oder ein Mitglied der Gruppe 14 des Periodensystems der Elemente enthält;
 Y eine Ligandengruppe ist, die Stickstoff, Phosphor, Sauerstoff oder Schwefel ist, oder wahlweise Z und Y zusammen ein kondensiertes Ringsystem bilden;
 X unabhängig bei jedem Auftreten ein Hydrid oder eine Hydrocarbyl-, Silyl- oder Germanylgruppe mit bis zu 20 Kohlenstoff-, Silizium- oder Germaniumatomen ist und
 45 A⁻ ein nicht-koordinierendes, kompatibles Anion einer Lewis Säure A ist mit einer relativen Lewis Acidität, die größer oder gleich der von Phenylbis(perfluorophenyl)boran ist, wobei die Verfahrensschritte das Inkontaktbringen eines Derivats eines Gruppe 4 oder Lanthanidmetalls, das der Formel I entspricht

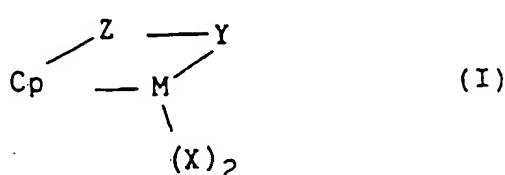


worin M, Cp, Z, Y und X wie vorhergehend definiert sind, mit der Lewis Säure A beinhalten.

2. Ein Verfahren nach Anspruch 1,
dadurch gekennzeichnet,
daß M Titan oder Zirkon ist.

5 3. Ein Verfahren nach Anspruch 1 oder 2,
dadurch gekennzeichnet,
daß -Z-Y- eine Amidosilan- oder eine Amidoalkangruppe ist.

10 4. Ein Verfahren nach Anspruch 3,
dadurch gekennzeichnet,
daß das Derivat der Formel I der Formel III entspricht

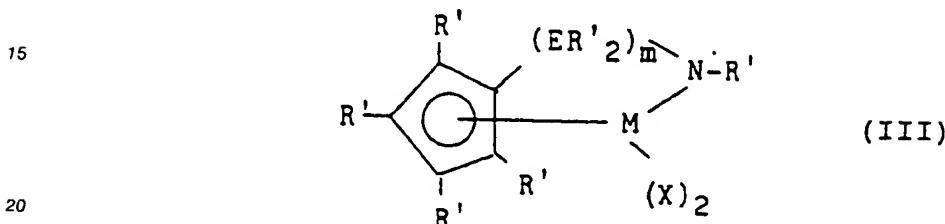

worin M Titan oder Zirkon ist, das an eine η^5 -Cyclopentadienylgruppe gebunden ist;
R' bei jedem Auftreten unabhängig voneinander aus Wasserstoff, Silyl, Alkyl, Aryl und Kombinationen
davon mit bis zu 20 Kohlenstoff- oder Siliziumatomen ausgewählt ist und wahlweise zwei oder mehr R'-
Gruppen an der Cyclopentadienylgruppe ein kondensiertes Ringsystem ausbilden können;
E Silizium oder Kohlenstoff ist;
X unabhängig bei jedem Auftreten Hydrid, Trimethylsilyl, Alkyl, Aryl oder Halogen-substituiertes Aryl
mit bis zu 20 Kohlenstoffatomen ist, und;
m gleich 1 oder 2 ist.

30

5. Ein Verfahren nach Anspruch 4,
dadurch gekennzeichnet,
daß -(ER'2)m-NR'- bis zu 20 Nicht-Wasserstoffatome aufweist.

35

6. Ein Verfahren nach Anspruch 5,
dadurch gekennzeichnet,
daß -(ER'2)m-NR'- (t-Butyl)(dimethylsilyl) oder (t-Butyl)-1-ethan-2-yl ist.

40 7. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
daß X gleich Hydrid oder ein C₁-C₁₀-Kohlenwasserstoff ist.

45 8. Ein Verfahren nach Anspruch 7,
dadurch gekennzeichnet,
daß X Methyl oder Benzyl ist.

9. Ein Verfahren nach Anspruch 8,
dadurch gekennzeichnet,
daß R' bei jedem Auftreten in der Cyclopentadienylgruppe Wasserstoff oder ein C₁-C₄-Alkyl ist und
wahlweise zwei oder mehrere dieser R' zusammen mit der Cyclopentadienylgruppe eine Tetrahydroindenyl- oder Tetrahydrofluorenylgruppe ausbilden und R' am Stickstoffatomen t-Butyl ist.

50

55 10. Ein Verfahren nach Anspruch 4,
dadurch gekennzeichnet,
daß R' an der Amidogruppe Methyl, Ethyl, Propyl, Butyl, Pentyl, Hexyl (einschließlich verzweigter und
zyclischer Isomere), Norbornyl, Benzyl oder Phenyl ist; die Cyclopentadienylgruppe Cyclopentadienyl,
Indenyl, Tetrahydroindenyl, Fluorenyl, Tetrahydrofluorenyl oder Octahydrofluorenyl ist; R' an den

Best Available Copy

vorhergehenden Cyclopentadienylgruppen bei jedem Auftreten Wasserstoff, Methyl, Ethyl, Propyl, Butyl, Pentyl, Hexyl (einschließlich verzweigter und zyklischer Isomere), Norbornyl, Benzyl oder Phenyl ist und X Methyl, Neopentyl, Trimethylsilyl, Norbornyl, Benzyl, Methylbenzyl, Phenyl oder Pentafluorphenyl ist.

5 11. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
 daß die Lewis Säure eine Borverbindung ist, die keine Halogeneinheiten aufweist, die direkt an das Boratom gebunden sind.

10 12. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
 daß die Lewis Säure ausgewählt ist aus Tris(pentafluorphenyl)boran, Tris(2,3,5,6-tetrafluorphenyl)boran, Tris(2,3,4,5-tetrafluorphenyl)boran, Tris(3,4,5-trifluorphenyl)boran, Tris(1,2,2-trifluorethenyl)boran,
 15 Phenylbis(perfluorphenyl)boran, Tris(3,4,5-trifluorphenyl)aluminium, Tris(perfluorphenyl)borat, 1,3,5-Cyclohexantriolethanborat und 1,1,1-Trimethylolethanborat.

20 13. Ein Verfahren nach Anspruch 12,
dadurch gekennzeichnet,
 daß die Lewis Säure Tris(pentafluorphenyl)boran ist.

25 14. Ein Verfahren nach Anspruch 13,
dadurch gekennzeichnet,
 daß das Derivat der Formel I ausgewählt ist aus (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silandibenzylzirkon, (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silandibenzyltitann, (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silantitandimethyl, (N-t-Butylamido)dimethyl-(tetrahydrofluorenyl)silantitandimethyl, (N-t-Butylamido)dimethyl(1,3-dimethyl-5,6,7,8-tetrahydroindenyl)-silantitandimethyl, (t-Butylamido)dimethyl(tetrahydrofluorenyl)silantitandibenzyl und (t-Butylamido)-dimethyl(t-butyl- η^5 -cyclopentadienyl)silantitandimethyl.

30 15. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
 daß das Derivat der Formel I und die Lewis Säure in einem Lösungsmittel bei 25 °C bis 50 °C in Kontakt gebracht werden, das ausgewählt ist aus C₅-C₁₀-Alkanen oder Cycloalkanen oder Mischungen davon.

35 16. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
 daß das Derivat der Formel I und die Lewis Säure in situ während einer Additionspolymerisationsreaktion in Kontakt gebracht werden.

40 17. Ein Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet,
 daß das Derivat der Formel I und die Lewis Säure in einem Äquivalenzverhältnis von 0,1:1 bis 10:1 in Kontakt gebracht werden.

45 18. Ein Verfahren nach Anspruch 17,
dadurch gekennzeichnet,
 daß dieses Verhältnis 0,2:1 bis 5:1 beträgt.

50 19. Ein Verfahren nach Anspruch 1,
dadurch gekennzeichnet,
 daß der Katalysator in homogener Art und Weise verwendet wird.

55 20. Ein Verfahren nach Anspruch 1,
dadurch gekennzeichnet,
 daß der Katalysator auf einem Träger verwendet wird.

26. Ein Katalysator nach Anspruch 25,
dadurch gekennzeichnet,
 daß -(ER'₂)_m-NR'- (t-Butyl)(dimethylsilyl) oder (t-Butyl)-1-ethan-2-yl ist.

5 27. Ein Katalysator nach einem der Ansprüche 21 bis 26,
dadurch gekennzeichnet,
 daß X gleich Hydrid oder ein C₁-C₁₀-Kohlenwasserstoffist.

10 28. Ein Katalysator nach Anspruch 27,
dadurch gekennzeichnet,
 daß X Methyl oder Benzyl ist.

15 29. Ein Katalysator nach Anspruch 28,
dadurch gekennzeichnet,
 daß R' bei jedem Auftreten in der Cyclopentadienylgruppe Wasserstoff oder ein C₁-C₄-Alkyl ist und
 wahlweise zwei oder mehrere dieser R' zusammen mit der Cyclopentadienylgruppe eine Tetrahydroindenyl- oder Tetrahydrofluorenylgruppe ausbilden und R' am Stickstoffatomen t-Butyl ist.

20 30. Ein Katalysator nach Anspruch 24,
dadurch gekennzeichnet,
 daß R' an der Amidogruppe Methyl, Ethyl, Propyl, Butyl, Pentyl, Hexyl (einschließlich verzweigter und
 zyklischer Isomere), Norbornyl, Benzyl oder Phenyl ist; die Cyclopentadienylgruppe Cyclopentadienyl,
 Indenyl, Tetrahydroindenyl, Fluorenyl, Tetrahydrofluorenyl oder Octahydrofluorenyl ist; R' an den
 vorhergehenden Cyclopentadienylgruppen bei jedem Auftreten Wasserstoff, Methyl, Ethyl, Propyl,
 25 Butyl, Pentyl, Hexyl (einschließlich verzweigter und zyklischer Isomere), Norbornyl, Benzyl oder Phenyl
 ist und X Methyl, Neopentyl, Trimethylsilyl, Norbornyl, Benzyl, Methylbenzyl, Phenyl oder Pentafluorphenyl ist.

30 31. Ein Katalysator nach einem der Ansprüche 31 bis 30,
dadurch gekennzeichnet,
 daß A⁻ abgeleitet ist von einer Borverbindung, die keine Halogeneinheiten aufweist, die direkt an das
 Boratom gebunden sind.

35 32. Ein Katalysator nach einem der Ansprüche 21 bis 31,
dadurch gekennzeichnet,
 daß A⁻ abgeleitet ist von Tris(pentafluorphenyl)boran, Tris(2,3,5,6-tetrafluorphenyl)boran, Tris(2,3,4,5-tetrafluorphenyl)boran, Tris(3,4,5-trifluorphenyl)boran, Tris(1,2,2-trifluorethenyl)boran, Phenylbis(perfluorphenyl)boran, Tris(3,4,5-trifluorphenyl)aluminium, Tris(perfluorphenyl)borat, 1,3,5-Cyclohexantriolborat und 1,1,1-Trimethylolethanborat.

40 33. Ein Katalysator nach Anspruch 32,
dadurch gekennzeichnet,
 daß A⁻ abgeleitet ist von Tris(pentafluorphenyl)boran.

45 34. Ein Katalysator nach Anspruch 33,
dadurch gekennzeichnet,
 daß der Katalysator abgeleitet ist von (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)-silan dibenzylzirkon, (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl) silan dibenzyltitan, (t-Butylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl) silan titandimethyl, (N-t-Butylamido)dimethyl(tetrahydrofluorenyl) silan titandimethyl, (N-t-Butylamido)dimethyl(1,3-dimethyl-5,6,7,8-tetrahydroindenyl) silan titandimethyl, (t-Butylamido)dimethyl(tetrahydrofluorenyl) silan titandibenzyl oder (t-Butylamido)dimethyl(t-butyl- η^5 -cyclopentadienyl) silan titandimethyl.

55 35. Ein Katalysator nach Anspruch 21,
dadurch gekennzeichnet,
 daß er einen Träger enthält.

Best Available Copy


36. Die Verwendung eines Katalysators nach einem der Ansprüche 21 bis 35 als einen Additionspolymerisationskatalysator.

37. Ein Additionspolymerisationsprozeß zur Herstellung eines Polymers durch Inkontaktbringen eines oder mehrerer additonspolymerisierbarer Monomere mit einem Koordinationspolymerisationskatalysator unter Additionspolymerisationsbedingungen, dadurch gekennzeichnet, daß der Katalysator wie in einem der Ansprüche 21 bis 35 beansprucht, ist.

10 Revendications

1. Procédé pour la préparation d'un catalyseur ayant une structure à séparation de charges limitée correspondant à la formule II:

15

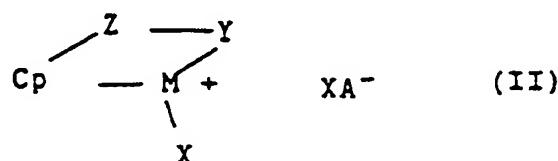

20

dans laquelle

M est un métal du groupe 4 ou de la série des lanthanides du tableau périodique des éléments;

25 Cp est un groupe cyclopentadiényle ou un dérivé de celui-ci qui est lié par des électrons π à M et substitué au moins par Z;

Z est une fraction divalente comprenant un atome d'oxygène, de soufre, de bore, ou un élément du groupe 14 du tableau périodique des éléments;


30 Y est un groupe ligand comprenant un atome d'azote, de phosphore, d'oxygène ou de soufre, ou éventuellement Z et Y forment ensemble un système cyclique condensé;

X indépendamment dans chaque cas est un hydrure ou un groupe hydrocarbyle, silyle ou germyle ayant jusqu'à 20 atomes de carbone, de silicium ou de germanium; et

A est un anion compatible de non coordination d'un acide de Lewis, A, ayant une acidité relative de Lewis supérieure ou égale à celle du phénylbis(perfluorophényl)borane,

35 les étapes du procédé consistant à mettre en contact un dérivé d'un métal du groupe 4 ou d'un lanthanide correspondant à la formule I:

40

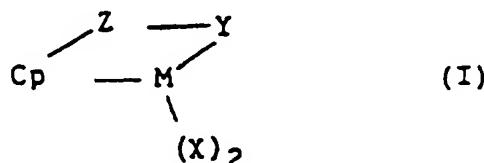

45

dans laquelle

M, Cp, Z, Y et X sont tels que précédemment définis, avec l'acide de Lewis, A.

2. Procédé selon la revendication 1 dans lequel M est le titane ou le zirconium.


50

3. Procédé selon l'une des revendications 1 ou 2, dans lequel -Z-Y- est un groupe amidosilane ou amidoalcané.

55

Best Available Copy

4. Procédé selon la revendication 3, dans lequel le dérivé de la formule I correspond à la formule III:

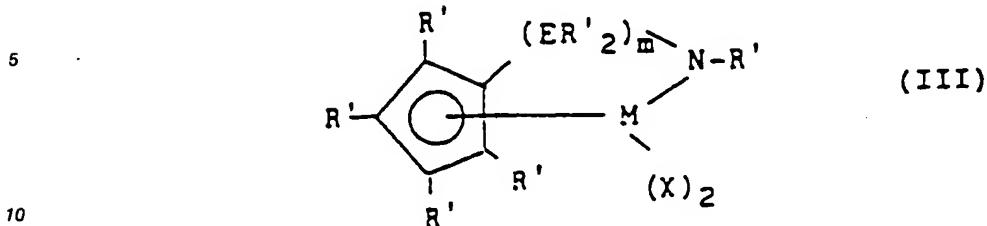

dans laquelle

M est un atome de titane ou de zirconium lié à un groupe η^5 -cyclopentadiényle;

15 chaque R' est choisi de manière indépendante parmi un atome d'hydrogène, les groupes silyle, alkyle, aryle et leurs combinaisons ayant jusqu'à 20 atomes de carbone ou de silicium, et éventuellement 2 ou plusieurs groupes R' sur le groupe cyclopentadiényle forment un système à cycle condensé;

E est un atome de silicium ou de carbone;

20 chaque X, de manière indépendante, est un groupe hydrure, triméthylsilyle, alkyle, aryle ou aryle substitué par un atome d'halogène, ayant jusqu'à 20 atomes de carbone; et

m vaut 1 ou 2.

25 5. Procédé selon la revendication 4, dans lequel -(ER'2)_m-NR'- possède jusqu'à 20 atomes non hydrogénés.

6. Procédé selon la revendication 5, dans lequel -(ER'2)_m-NR'- est le groupe (tert-butyl)(diméthylsilyle) ou (tert-butyl)-1-éthan-2-yle.

30 7. Procédé selon l'une des revendications précédentes, dans lequel X est un groupe hydrure ou hydrocarbyle en C₁-C₁₀.

8. Procédé selon la revendication 7, dans lequel X est un groupe méthyle ou benzyle.

35 9. Procédé selon la revendication 8, dans lequel chaque R' dans le groupe cyclopentadiényle est un atome d'hydrogène ou un groupe alkyle en C₁-C₄ et éventuellement deux ou plus desdits R' conjointement avec le groupe cyclopentadiényle formant un groupe tétrahydroindényle ou tétrahydrofluorényle, et R' sur l'atome d'azote est un groupe tert-butyle.

40 10. Procédé selon la revendication 4, dans lequel le groupe R' sur le groupe amido est un groupe méthyle, éthyle, propyle, butyle, pentyle, hexyle, (y compris les isomères ramifiés et cycliques), norbornyle, benzyle ou phényle; le groupe cyclopentadiényle est le cyclopentadiényle, l'indényle, le tétrahydroindényle, le fluorényle, le tétrahydrofluorényle, ou l'octahydrofluorényle; chaque R' sur les groupes cyclopentadiényle précédents est un atome d'hydrogène, un groupe méthyle, éthyle, propyle, butyle, pentyle, hexyle, (y compris les isomères ramifiés et cycliques), norbornyle, benzyle, ou phényle; et X est un groupe méthyle, néopentyle, triméthylsilyle, norbornyle, benzyle, méthylbenzyle, phényle, ou pentafluorophényle.

50 11. Procédé selon l'une des revendications précédentes dans lequel l'acide de Lewis est un composé du bore manquant de fraction halogène directement lié au bore.

12. Procédé selon l'une des revendications précédentes, dans lequel l'acide de Lewis est choisi parmi le tris(pentafluorophényl)borane, le tris(2,3,5,6-tétrafluorophényl)borane, le tris(2,3,4,5-tétrafluorophényl)-borane, le tris(3,4,5-trifluorophényl)borane, le tris(1,2,2-trifluoroéthényle)borane, le phénylbis-(perfluorophényl)borane, le tris(3,4,5-trifluorophényl) aluminium, le tris(perfluorophényl)borate, le 1,3,5-cyclohexanetriolborate, et le 1,1,1-triméthyloléthaneborate.

13. Procédé selon la revendication 12, dans lequel l'acide de Lewis est le tris(pentafluorophényl)borane.

14. Procédé selon la revendication 13, dans lequel le dérivé de formule I est choisi parmi:
le (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-dibenzylzirconium;
le (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-dibenzyltitane;
le (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-diméthyltitane;
le (N-tert-butylamido)diméthyl(tétrahydrofluorényl) silane-diméthyltitane;
le (N-tert-butylamido)diméthyl(1,3-diméthyl-5,6,7,8-tétrahydroindényl)silane-diméthyltitane;
le (tert-butylamido)diméthyl(tétrahydrofluorényl)silanedibenzyltitane; et
le (tert-butylamido)diméthyl(tert-butyl- η^5 -cyclopentadiényl)silane-diméthyltitane.

5

15. Procédé selon l'une des revendications précédentes, dans lequel le dérivé de formule I et l'acide de Lewis sont mis en contact dans un solvant choisi parmi les alcanes en C₅-C₁₀ ou les cycloalcanes ou leurs mélanges à des températures comprises entre 25 °C et 50 °C.

10

16. Procédé selon l'une des revendications précédentes, dans lequel le dérivé de formule I et l'acide de Lewis sont mis en contact in situ pendant une réaction de polymérisation d'addition.

15

17. Procédé selon l'une des revendications précédentes, dans lequel le dérivé de formule I et l'acide de Lewis sont mis en contact dans un rapport en équivalents compris entre 0,1:1 et 10:1.

20


18. Procédé selon la revendication 17, dans lequel ledit rapport est de 0,2:1 à 5:1.

25

19. Procédé selon la revendication 1, dans lequel le catalyseur est utilisé d'une manière homogène.

20. Procédé selon la revendication 1, dans lequel le catalyseur est utilisé sur un support.

21. Catalyseur ayant une structure à séparation de charges, correspondant à la formule II:

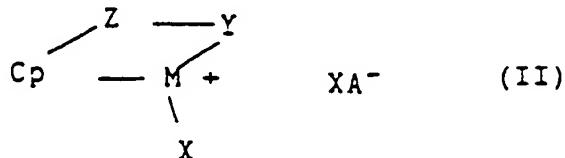

dans laquelle

M est un métal du groupe 4 ou de la série des lanthanides du tableau périodique des éléments:

Cp est un groupe cyclopentadiényle substitué ou un dérivé de celui-ci qui est lié par des électrons π à M et substitué au moins par Z:

Z est une fraction valente comprenant un atome d'oxygène, de soufre, de bore, ou un élément du groupe 14 du tableau périodique des éléments:

Y est un groupe ligand comprenant un atome d'azote, de phosphore, d'oxygène ou de soufre, ou éventuellement Z et Y forment ensemble un système cyclique condensé.


X indépendamment dans chaque cas est un hydrure ou un groupe hydrocarbyle, silyle ou germyle ayant jusqu'à 20 atomes de carbone, de silicium ou de germanium; et

A^- est un anion compatible de non coordination d'un acide de Lewis, A, ayant une acidité relative de Lewis supérieure ou égale à celle du phénylbis(perfluorophénolyl)borane.

Catalyseur selon la revendication 21, dans lequel M₁ est un métal de transition.

23. Catalyseur selon l'une des revendications 21 ou 22, dans lequel -Z-Y- est un groupe amidosilane ou amidoalcane.

24. Catalyseur selon la revendication 23, dans lequel le catalyseur a la formule IIIA:

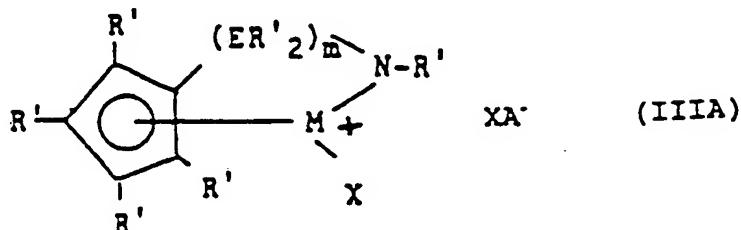

dans laquelle

A⁻ est tel que défini dans la revendication 21;

15 M est un atome de titane ou de zirconium lié à un groupe cyclopentadiényle η^5 ;

chaque R' est choisi de manière indépendante parmi un atome d'hydrogène, un groupe silyle, alkyle, aryle et leurs combinaisons ayant jusqu'à 20 atomes de carbone ou de silicium, et éventuellement 2 ou plusieurs groupes R' sur le groupe cyclopentadiényle peuvent former un système à cycle condensé;

20 E est un atome de silicium ou de carbone;

chaque X de manière indépendante est un hydrure, un groupe triméthylsilyle, alkyle, aryle ou aryle substitué par un atome d'halogène ayant jusqu'à 20 atomes de carbone; et

m vaut 1 ou 2.

25 25. Catalyseur selon la revendication 24, dans laquelle -(ER')_m-NR'- possède jusqu'à 20 atomes non hydrogène.

26. Catalyseur selon la revendication 25, dans lequel -(ER')_m-NR'- est le (tert-butyl)(diméthylsilyle) ou le (tert-butyl)-1-éthan-2-yle.

30 27. Catalyseur selon l'une des revendications 21 à 26, dans lequel X est un hydrure ou un hydrocarbyle en C₁-C₁₀.

28. Catalyseur selon la revendication 27, dans lequel X est un méthyle ou un benzyle.

35 29. Catalyseur selon la revendication 28, dans lequel chaque R' dans le groupe cyclopentadiényle est un atome d'hydrogène ou un groupe alkyle en C₁-C₄ et éventuellement deux ou plus desdits R' conjointement avec le groupe cyclopentadiényle formant un groupe tétrahydroindényle ou tétrahydrofluorényle, et R' sur l'atome d'azote est un groupe tert-butyle.

40 30. Catalyseur selon la revendication 24, dans lequel le groupe R' sur le groupe amido est un groupe méthyle, éthyle, propyle, butyle, pentyle, hexyle, (y compris les isomères ramifiés et cycliques), norbornyle, benzyle ou phényle; le groupe cyclopentadiényle est un groupe cyclopentadiényle, indényle, tétrahydroindényle, fluorényle, tétrahydrofluorényle, ou octahydrofluorényle; chaque R' sur les groupes cyclopentadiényle précédents est un atome d'hydrogène, un groupe méthyle, éthyle, propyle, butyle, pentyle, hexyle, (y compris les isomères ramifiés et cycliques), norbornyle, benzyle, ou phényle; et X est un groupe méthyle, néopentyle, triméthylsilyle, norbornyle, benzyle, méthylbenzyle, phényle, ou pentafluorophényle.

50 31. Catalyseur selon l'une des revendications 21 à 30, dans lequel A⁻ est dérivé d'un composé de bore exempt de groupe halogène directement lié au bore.

32. Catalyseur selon l'une des revendications 21 à 31, dans lequel A⁻ est dérivé du tris(pentafluorophényl)-borane, du tris(2,3,5,6-tétrafluorophényl)borane, du tris(2,3,4,5-tétrafluorophényl)borane, du tris(3,4,5-trifluorophényl)borane, du tris(1,2,2-trifluoroéthényle)borane, du phénylbis(perfluorophényl) borane, du tris(3,4,5-trifluorophényl)aluminium, du tris(perfluorophénylborate, du 1,3,5-cyclohexanetriolborate et du 1,1,1-triméthyloléthaneborate.

33. Catalyseur selon la revendication 32, dans lequel A⁻ est le tris(pentafluorophényl)borane.

34. Catalyseur selon la revendication 33, dans lequel le dérivé de formule I est dérivé:
du (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-dibenzylzirconium;
du (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-dibenzyltitane;
du (tert-butylamido)diméthyl(tétraméthyl- η^5 -cyclopentadiényl)silane-diméthyltitane;
du (N-tert-butylamido)diméthyl(tétrahydrofluorényl) silane-diméthyltitane;
du (N-tert-butylamido)diméthyl(1,3-diméthyl-5,6,7,8-tétrahydroindényl)silane-diméthyltitane;
du (tert-butylamido)diméthyl(tétrahydrofluorényl)silane-dibenzyltitane; ou
du (tert-butylamido)diméthyl(tert-butyl- η^5 -cyclopentadiényl)silane-diméthyltitane.

35. Catalyseur selon la revendication 21 comprenant un support.

36. Utilisation d'un catalyseur selon l'une des revendications 21 à 35 en tant que catalyseur de polymérisation par addition.

37. Procédé de polymérisation par addition pour préparer un polymère en mettant en contact un ou plusieurs monomères polymérisables par addition avec un catalyseur de polymérisation et de coordination dans des conditions de polymérisation par addition, caractérisé en ce que le catalyseur est tel que revendiqué dans l'une des revendications 21 à 35.

25

30

35

40

45

50

Best Available Copy

55